



# ARC Specifications - Appendix 2

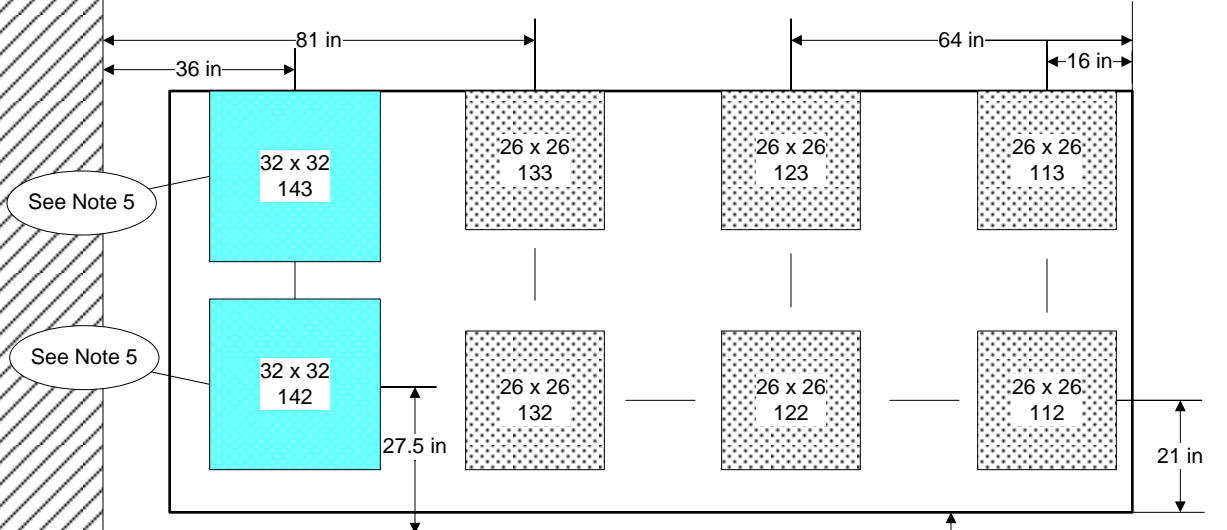


**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

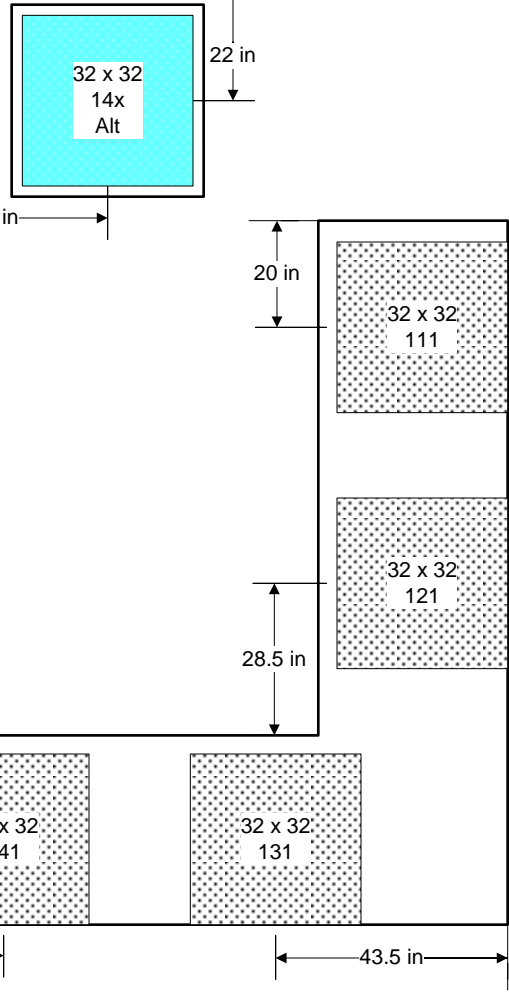

# ARC Specifications - Appendix 2

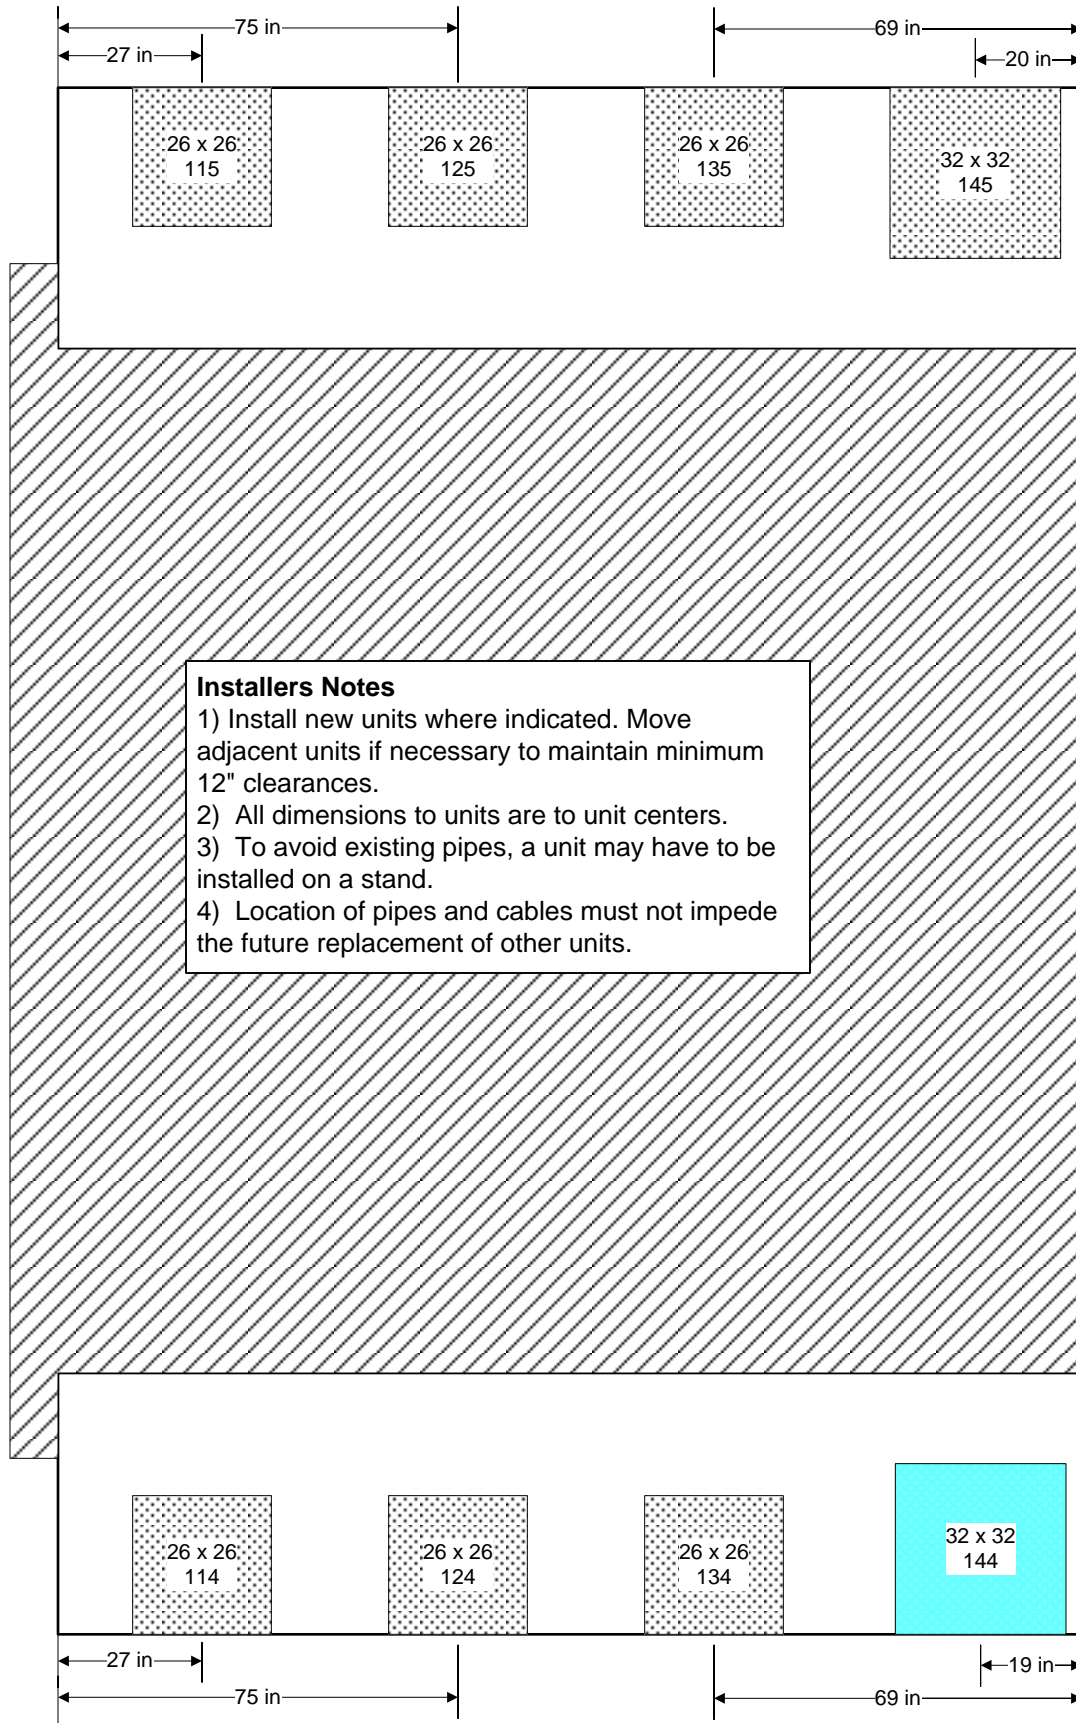


### Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.


# ARC Specifications - Appendix 2

### Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.



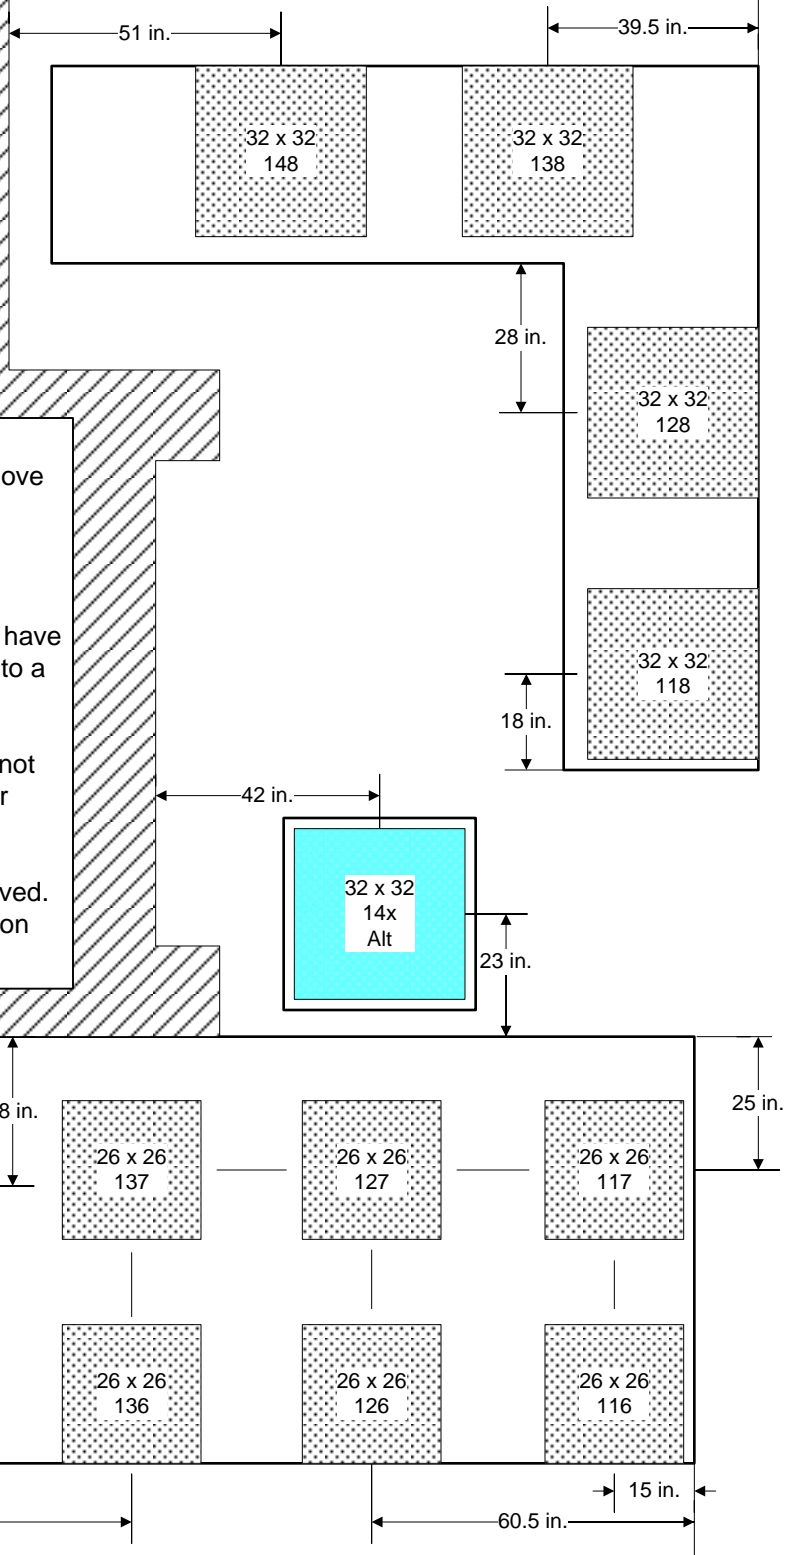


# ARC Specifications - Appendix 2

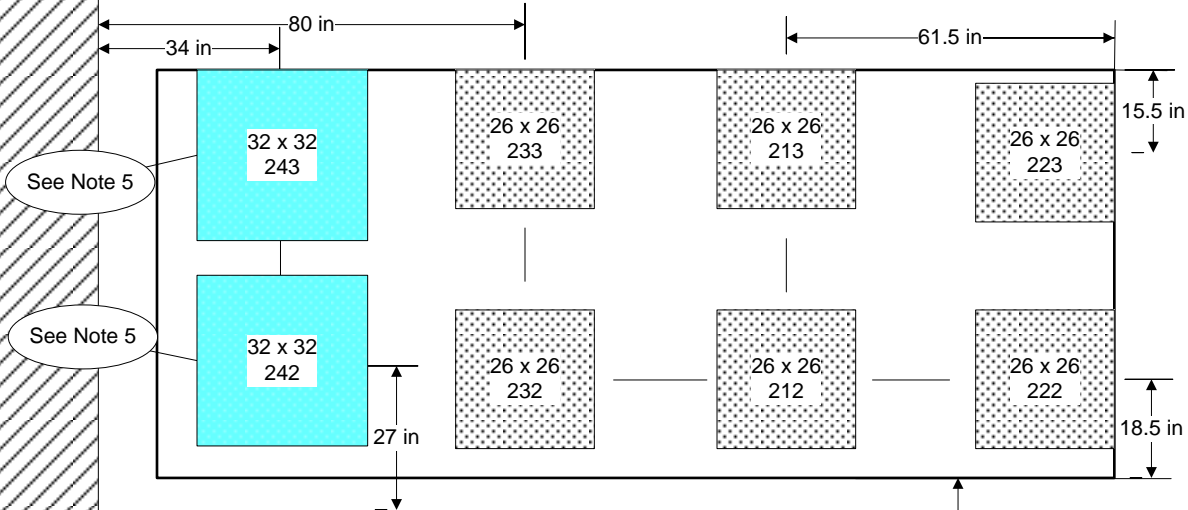


### Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

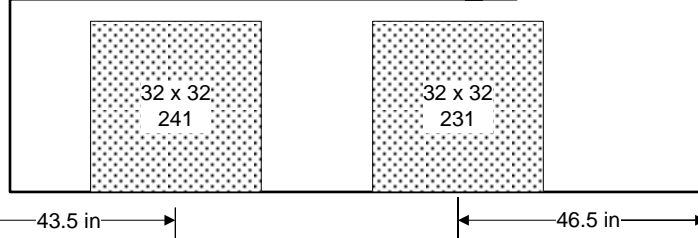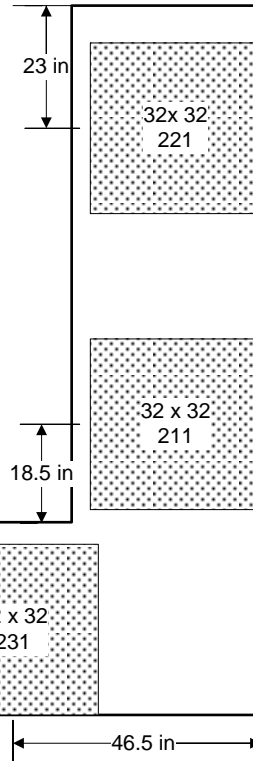



# ARC Specifications - Appendix 2

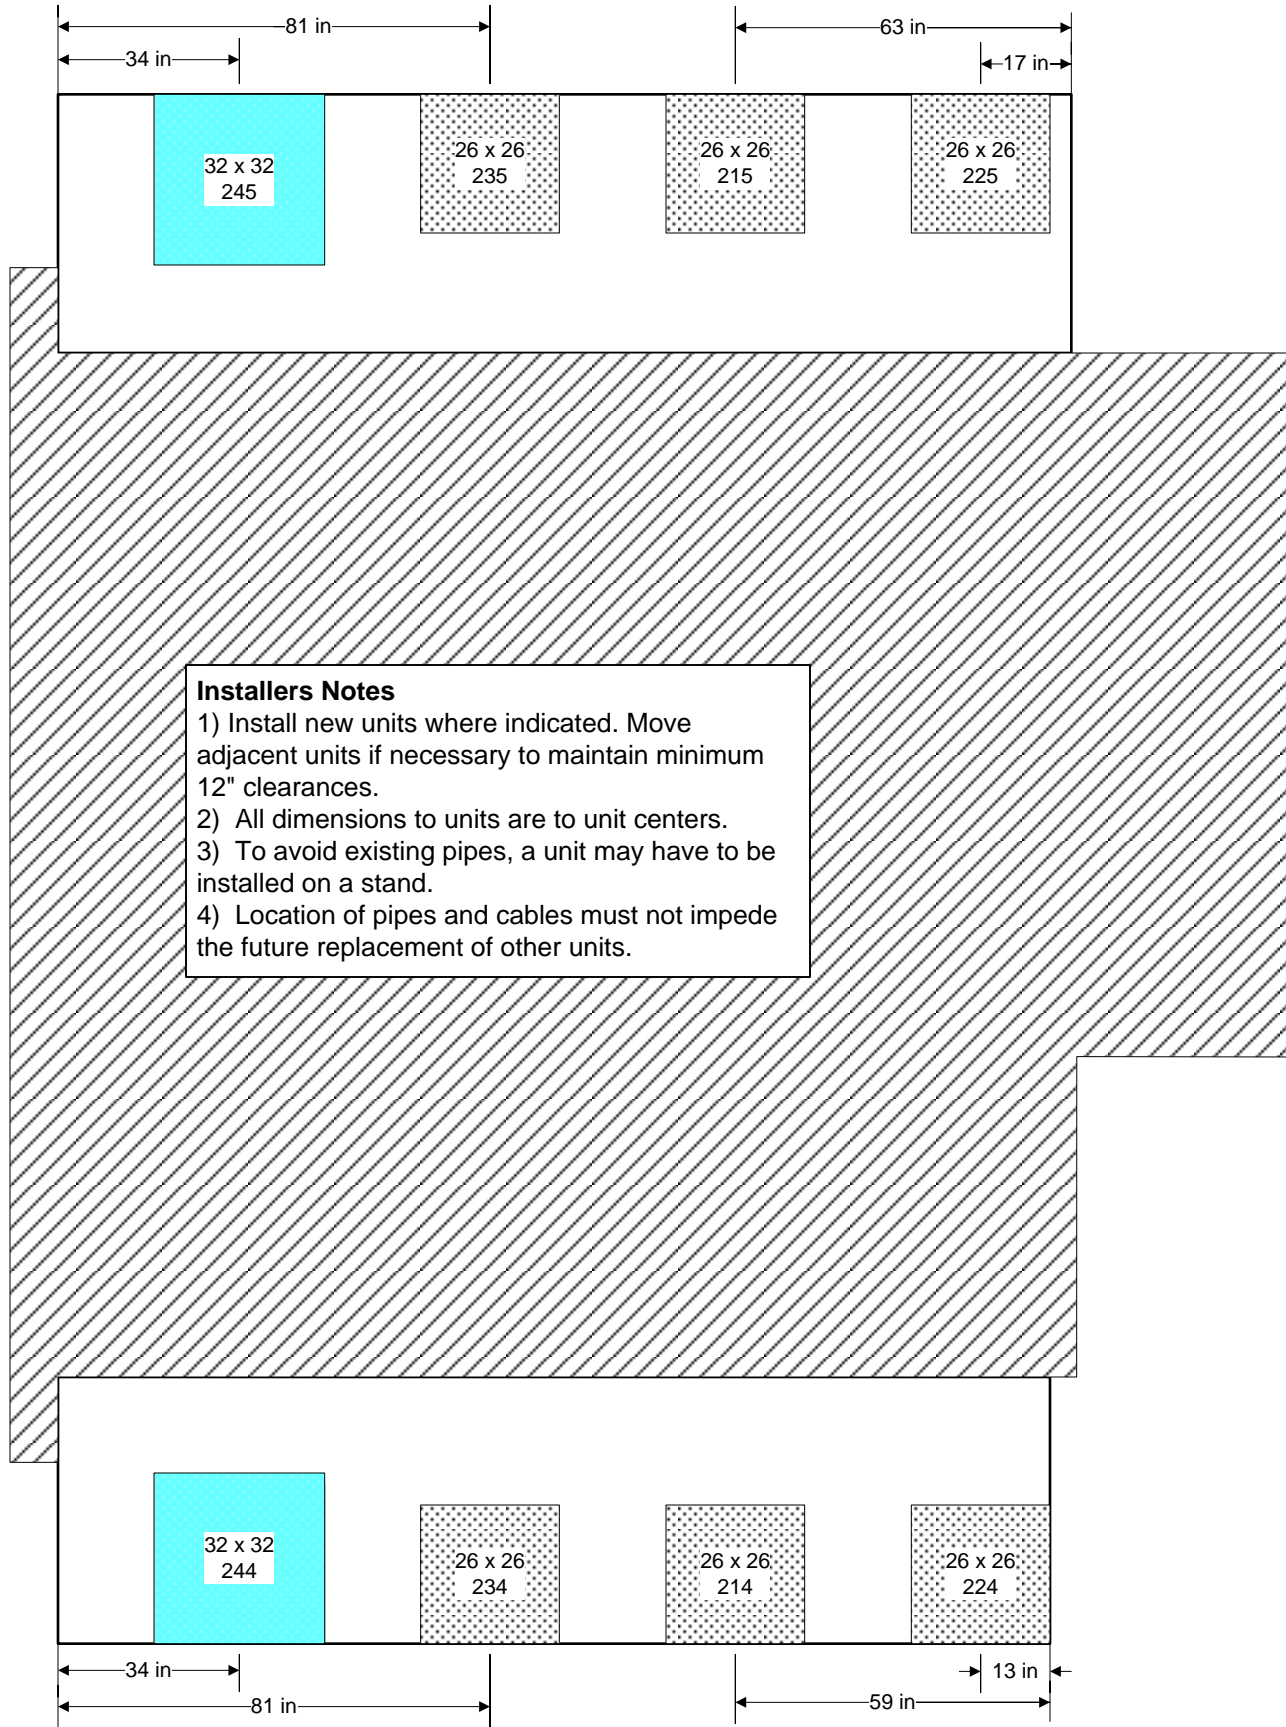

# ARC Specifications - Appendix 2


## Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

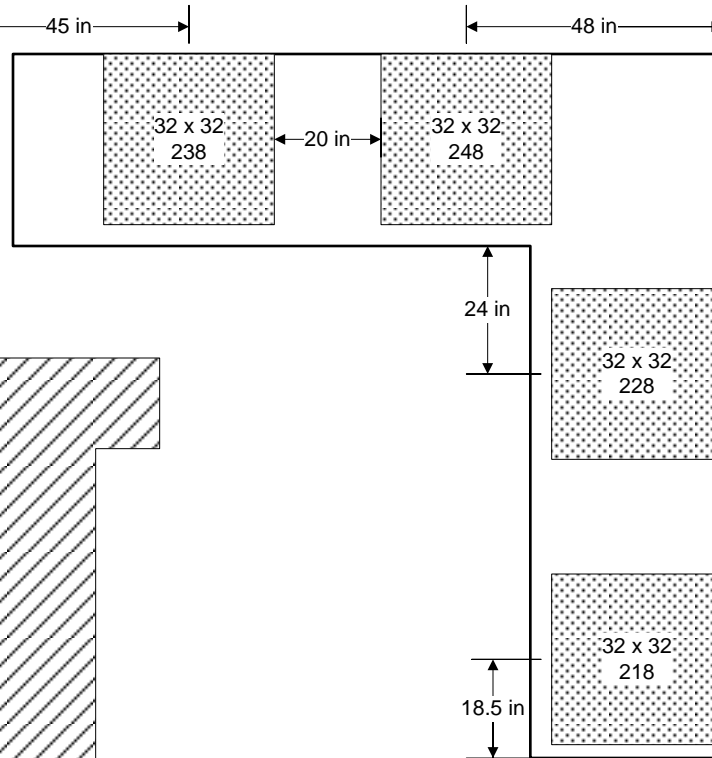


See Note 5

See Note 5


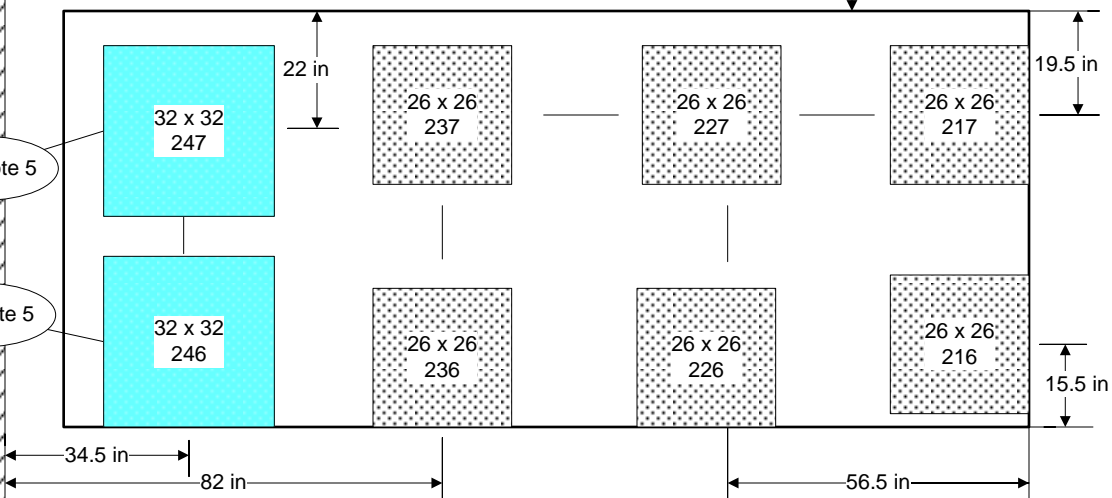


# ARC Specifications - Appendix 2

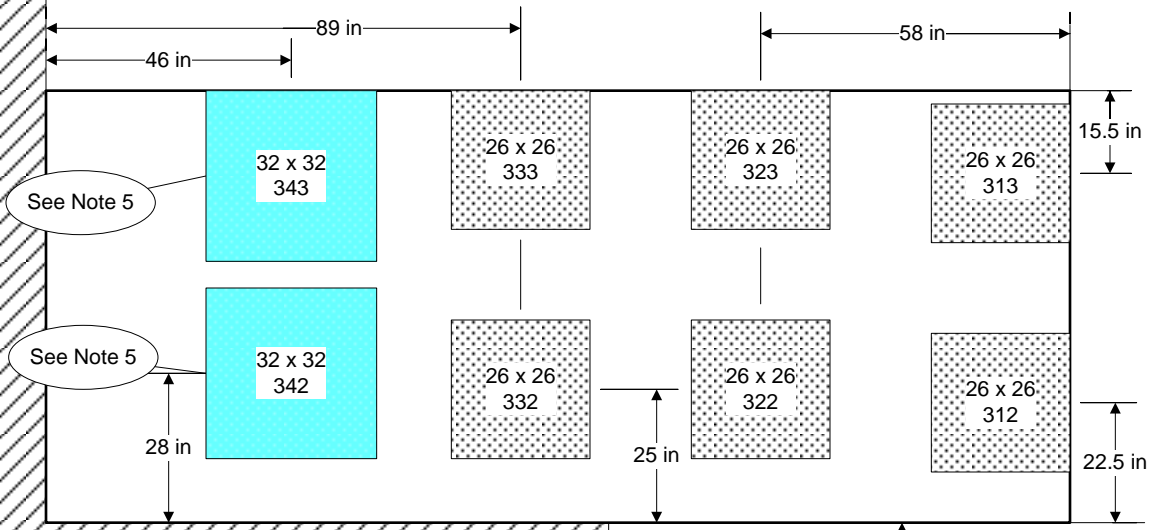


**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

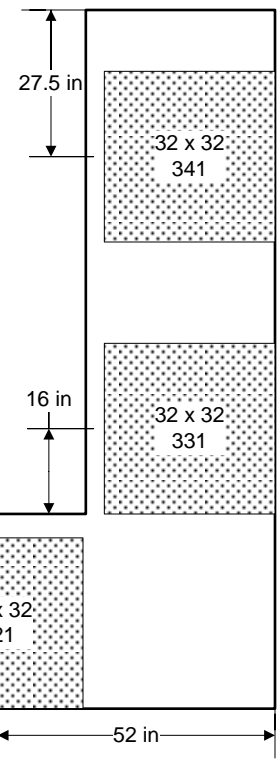

# ARC Specifications - Appendix 2



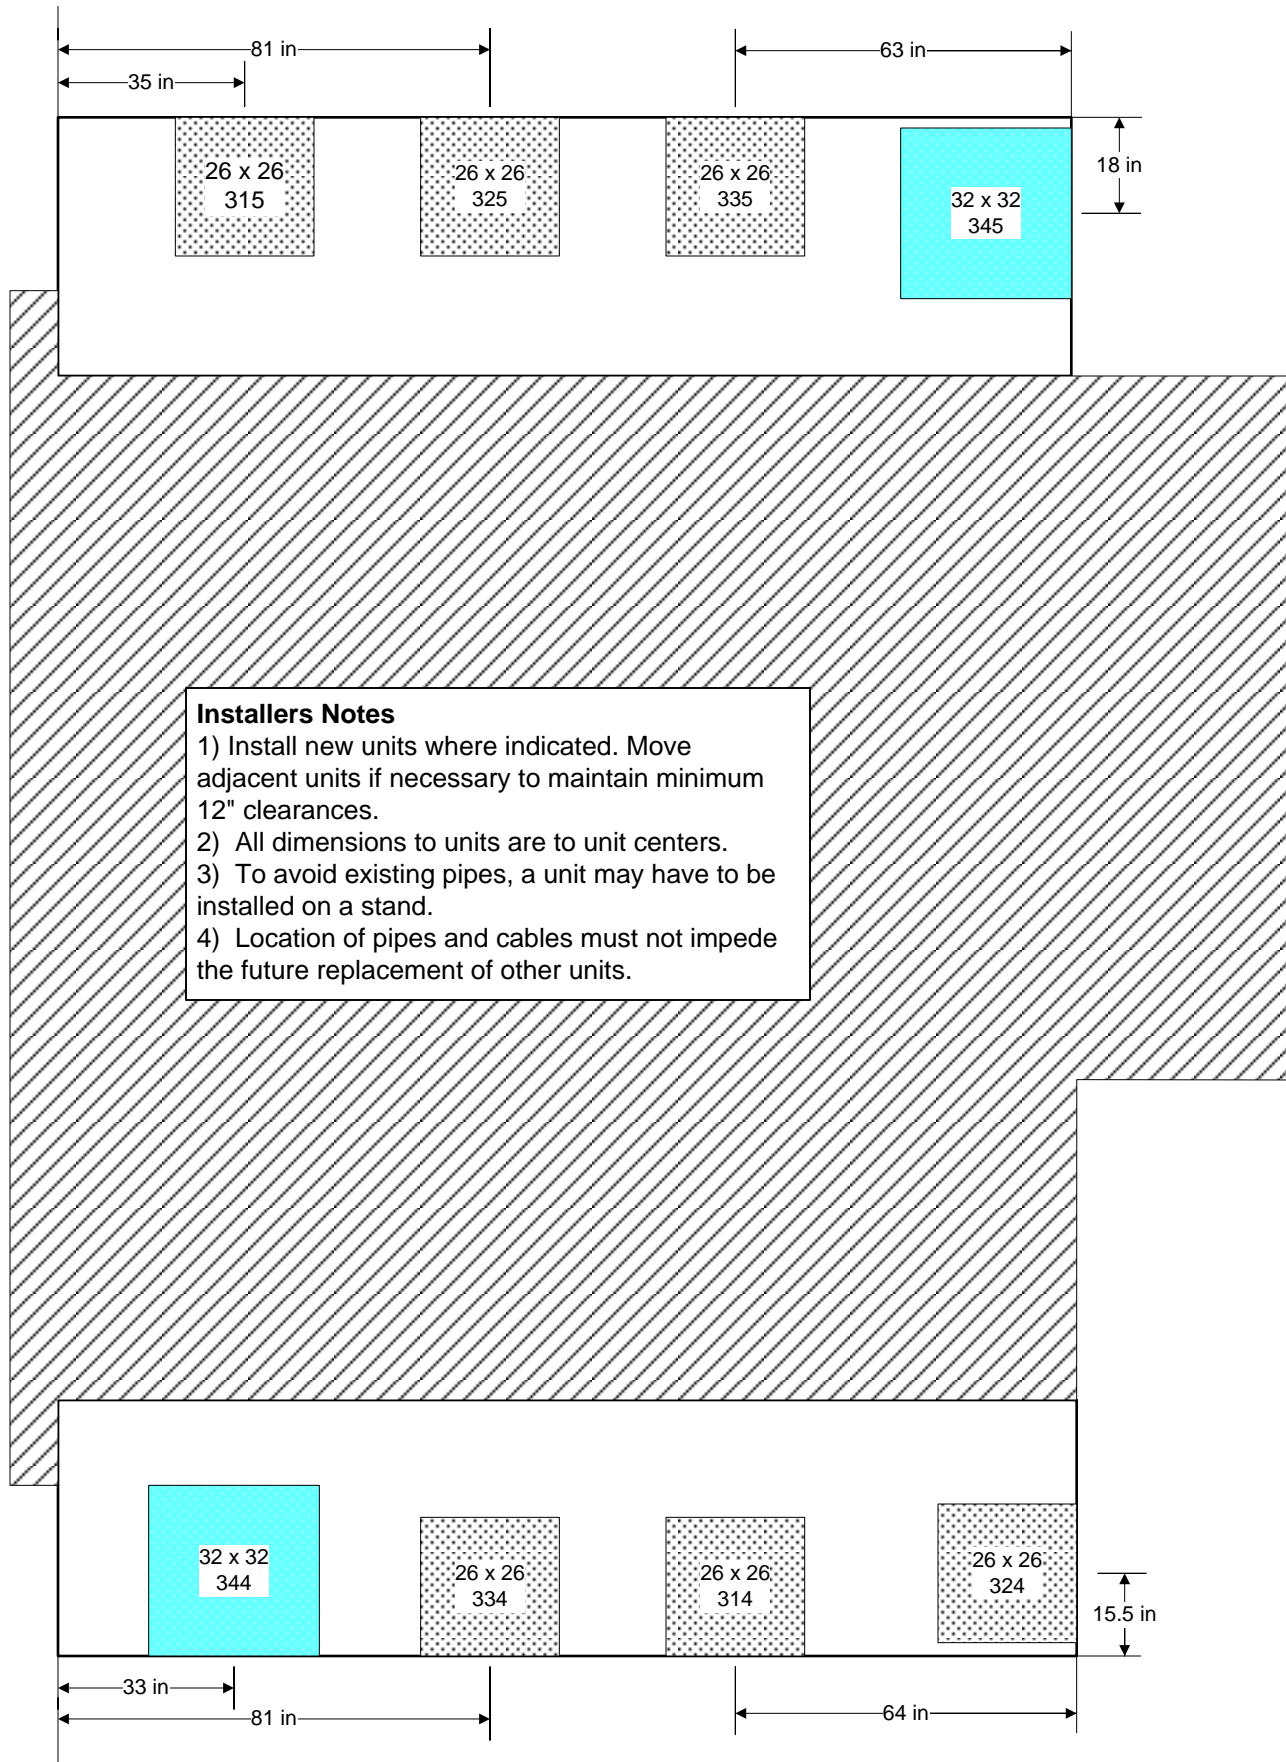





# ARC Specifications - Appendix 2

## Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

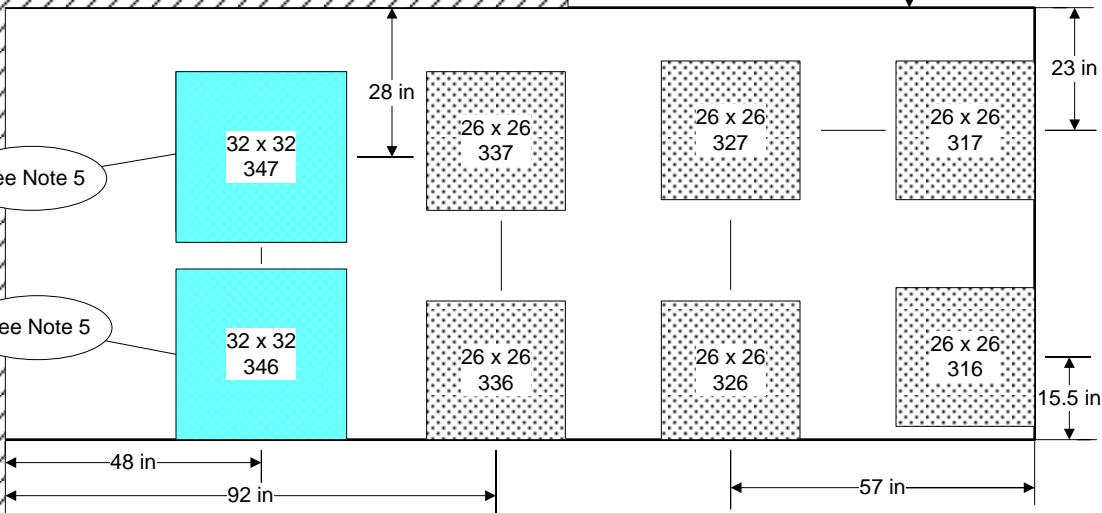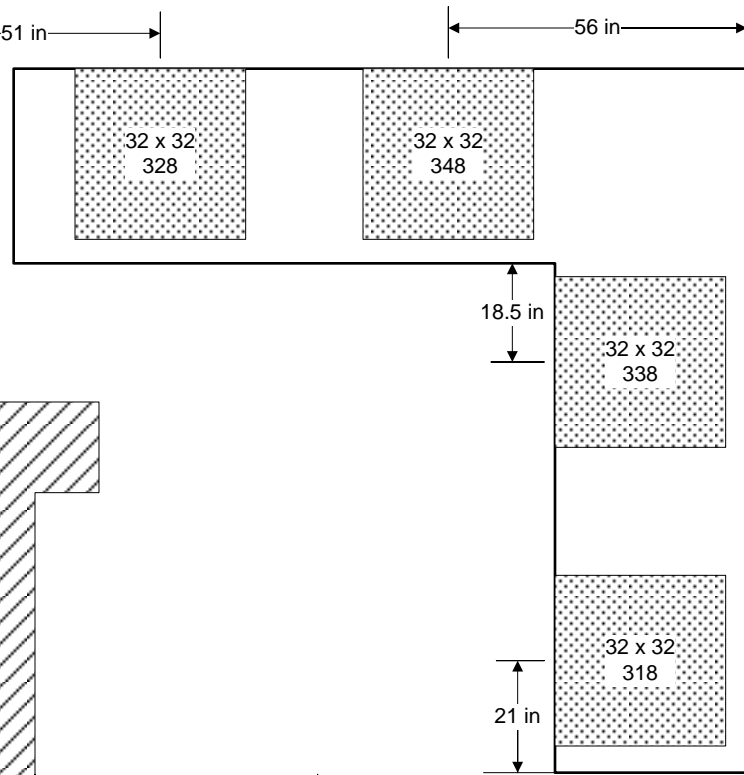


# ARC Specifications - Appendix 2

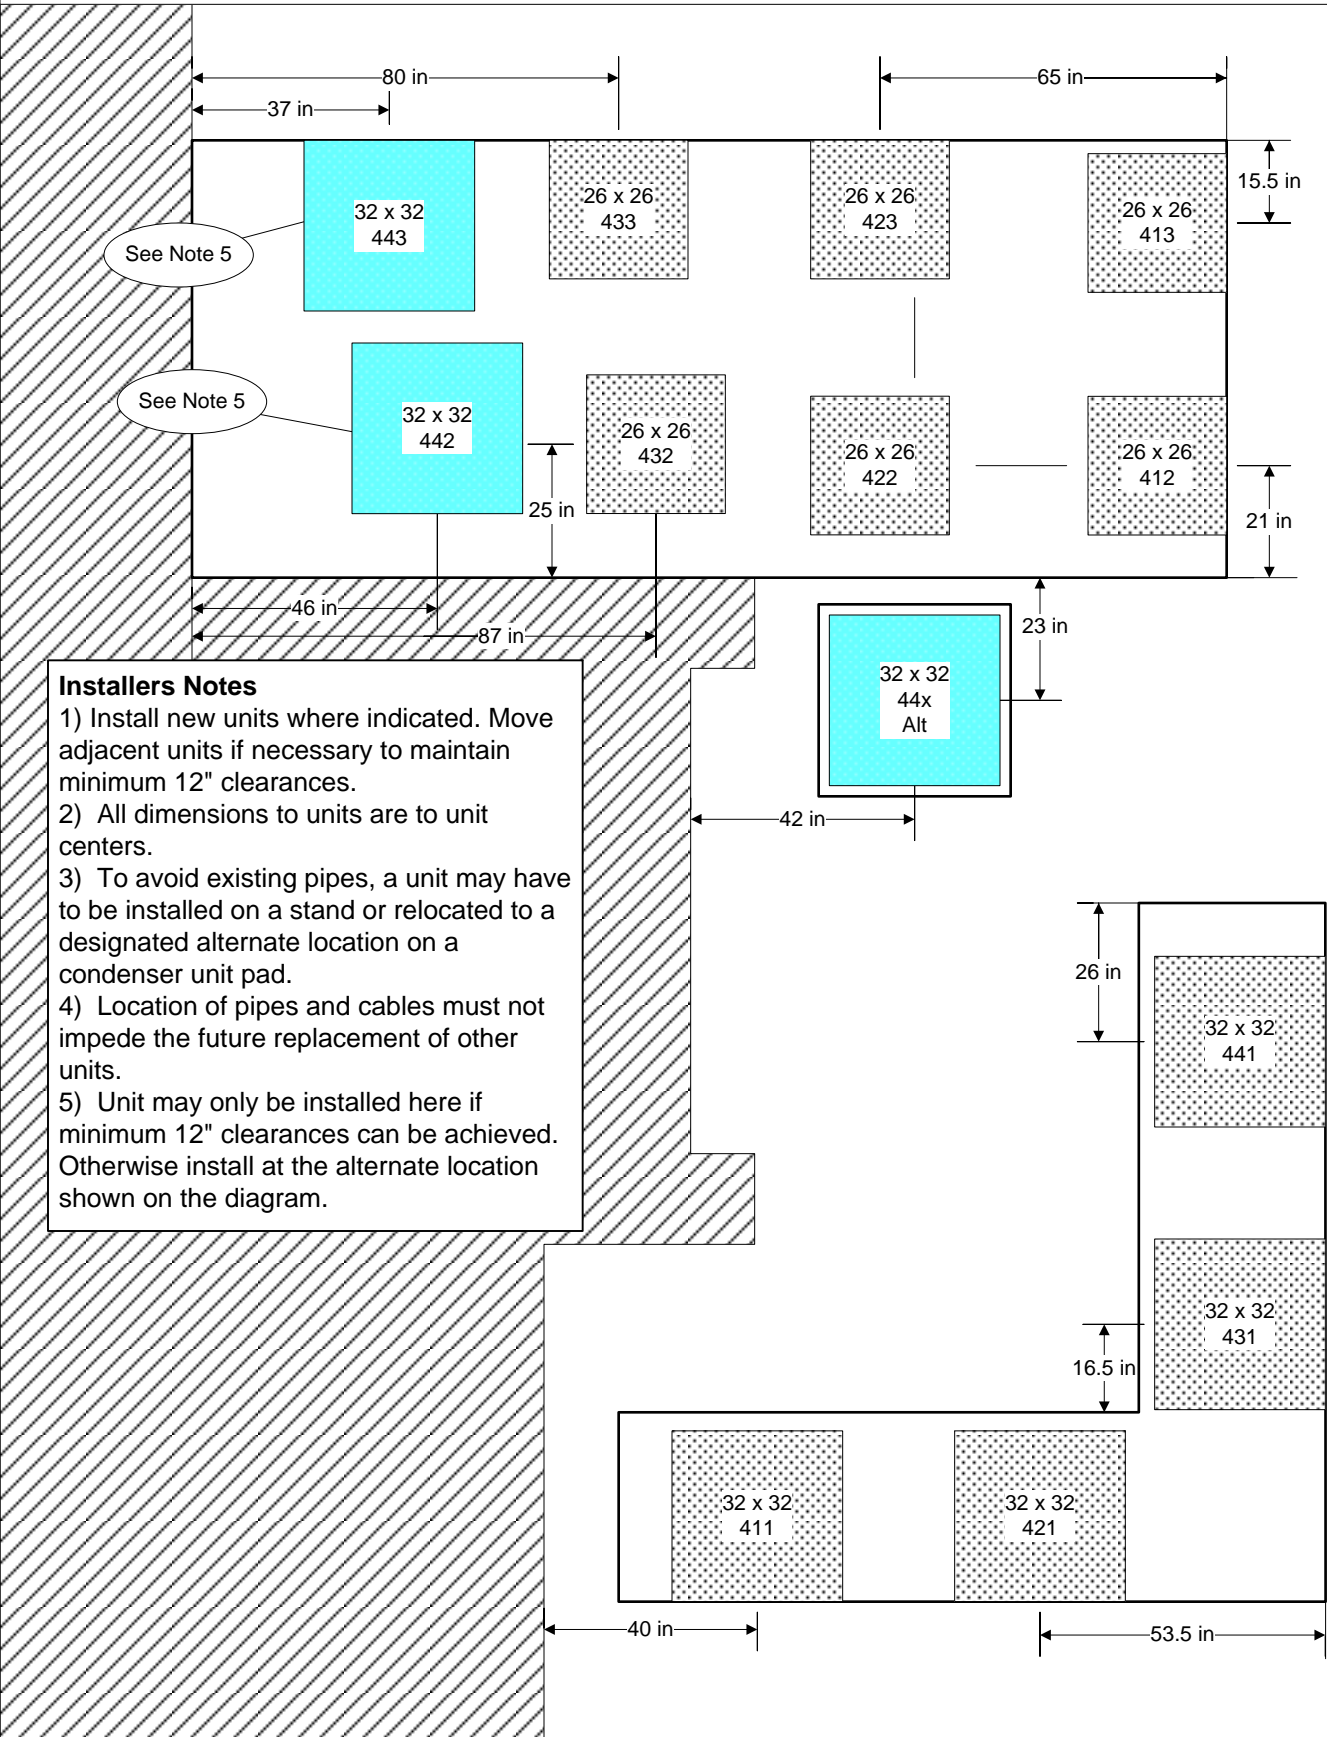

**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.



# ARC Specifications - Appendix 2

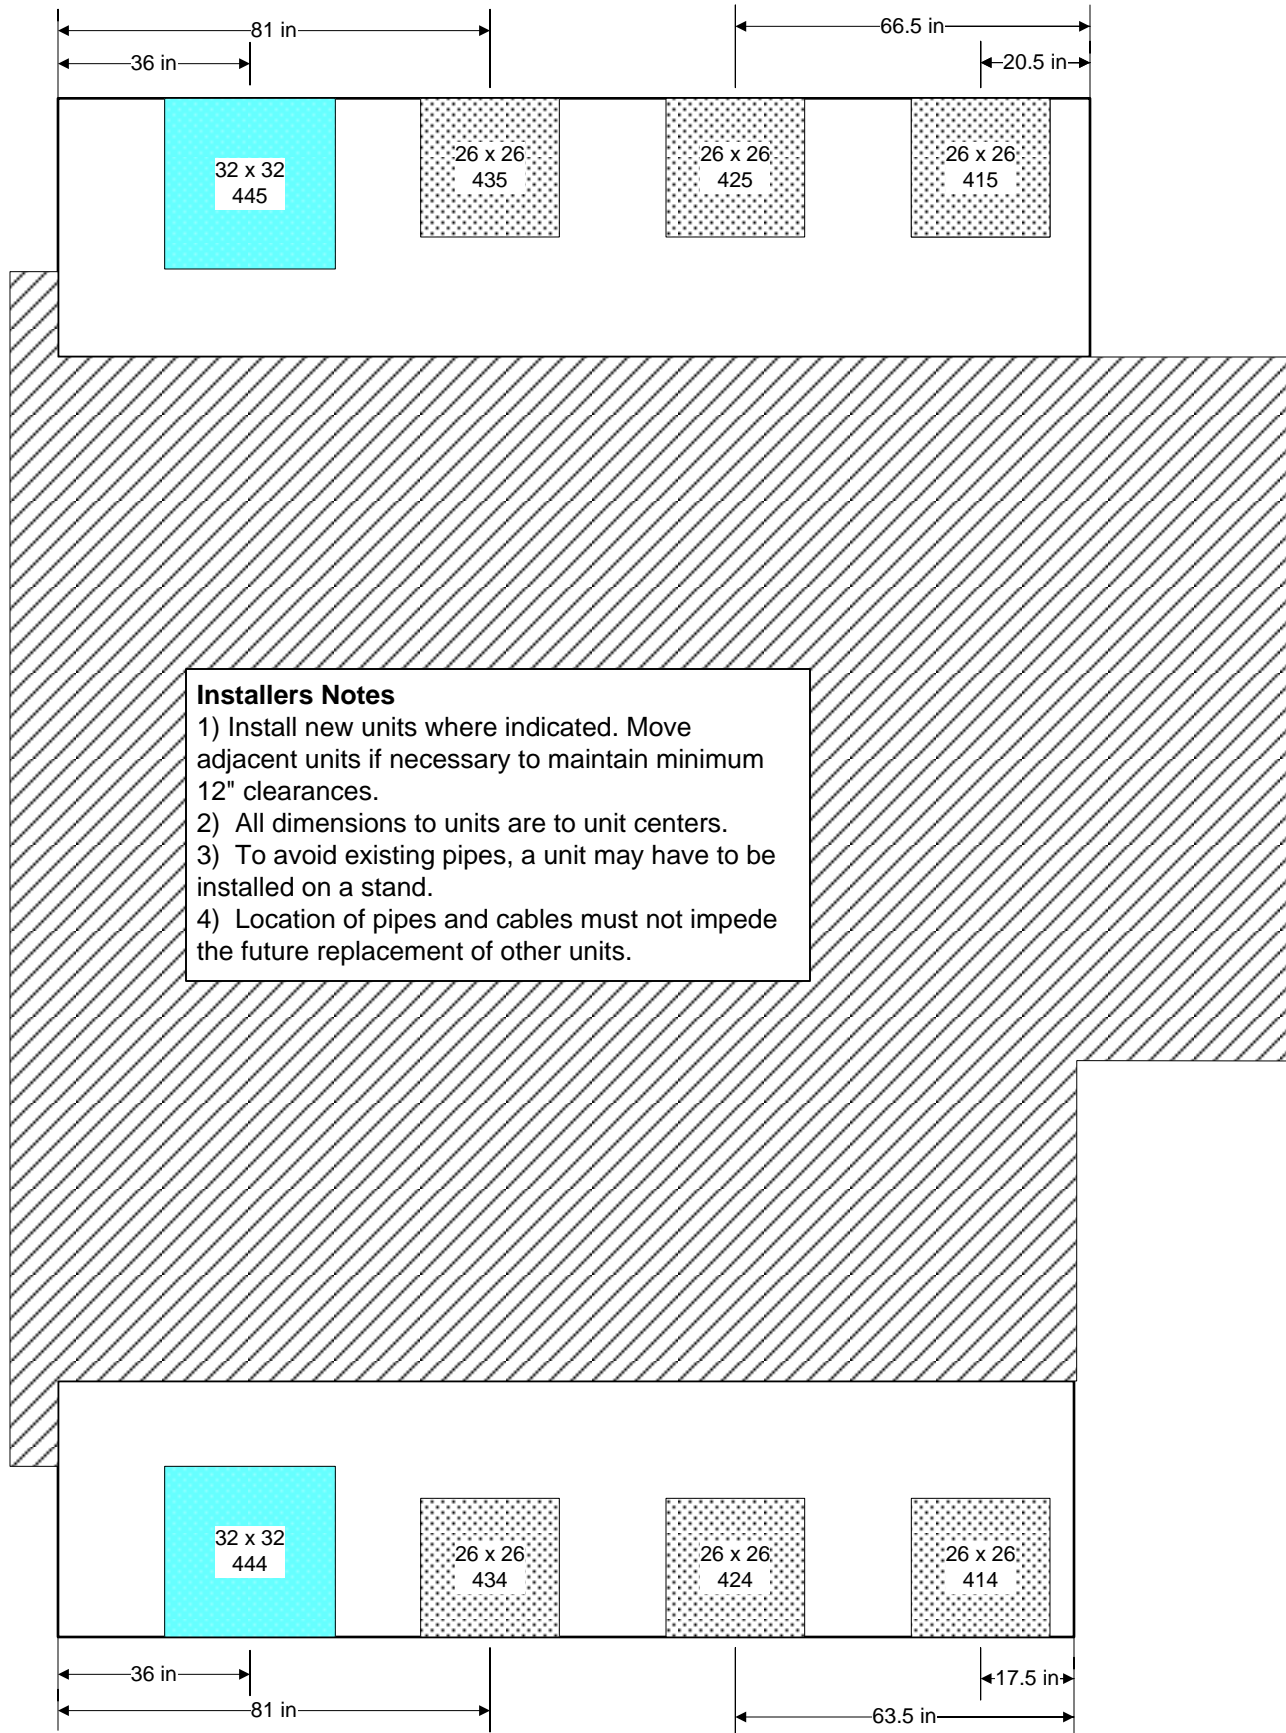

# ARC Specifications - Appendix 2

## Installers Notes


- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

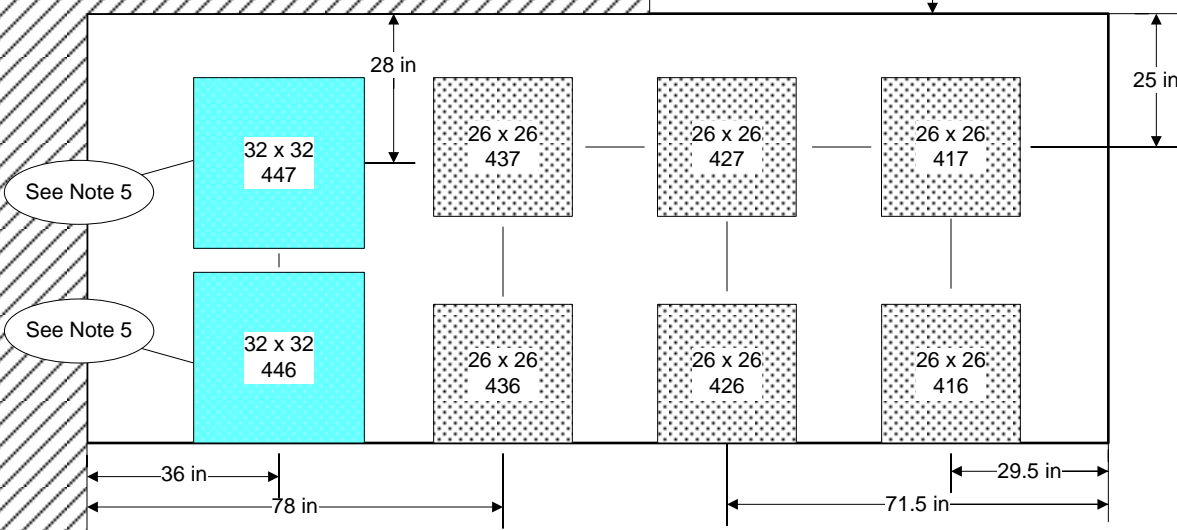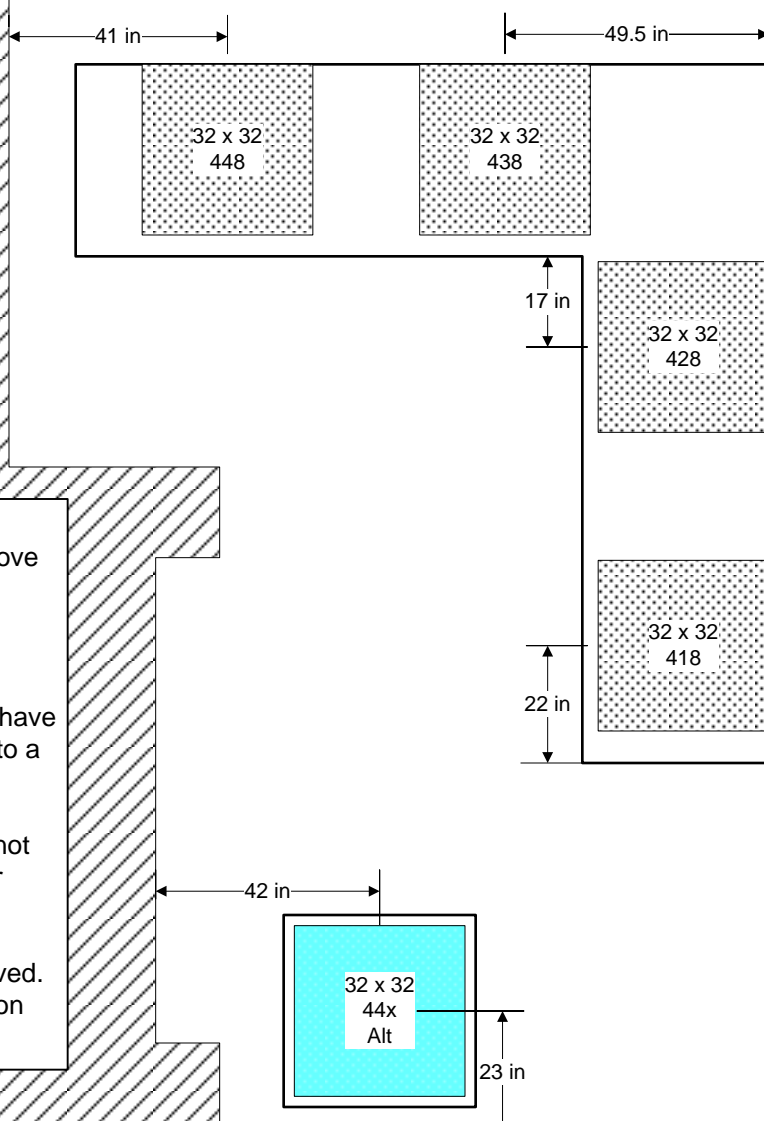


# ARC Specifications - Appendix 2

**Installers Notes**


- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.

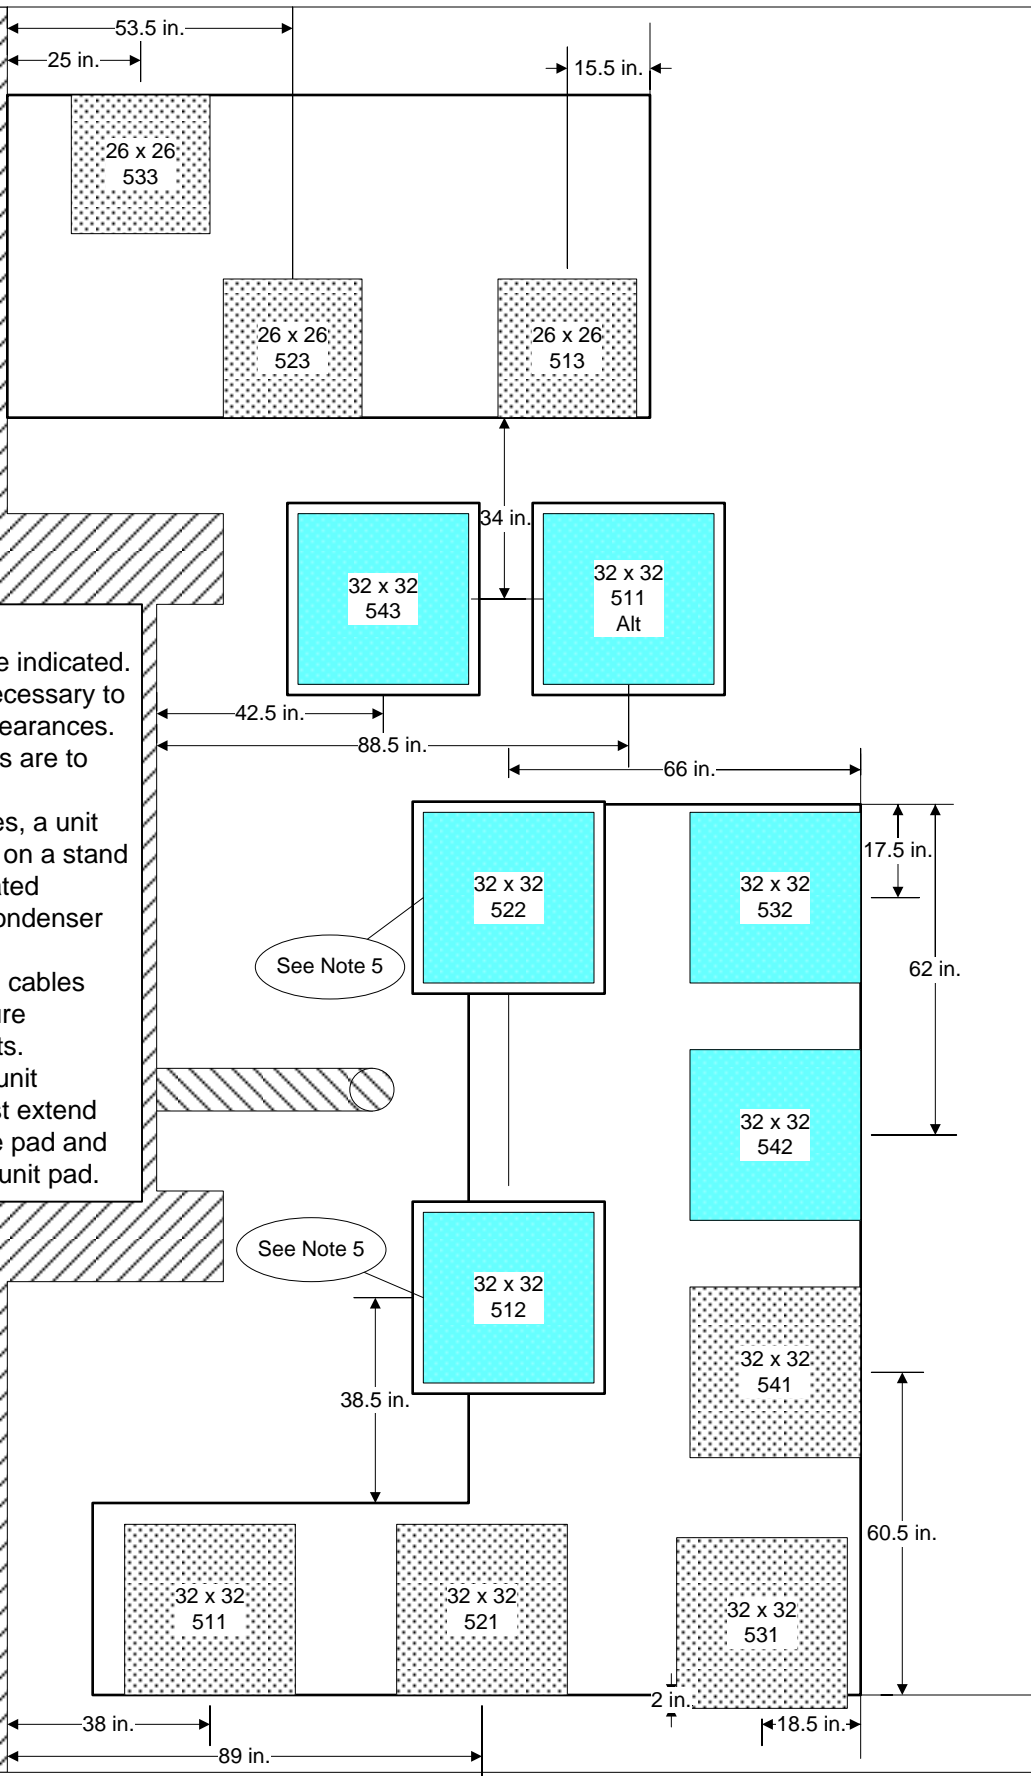

## ARC Specifications - Appendix 2

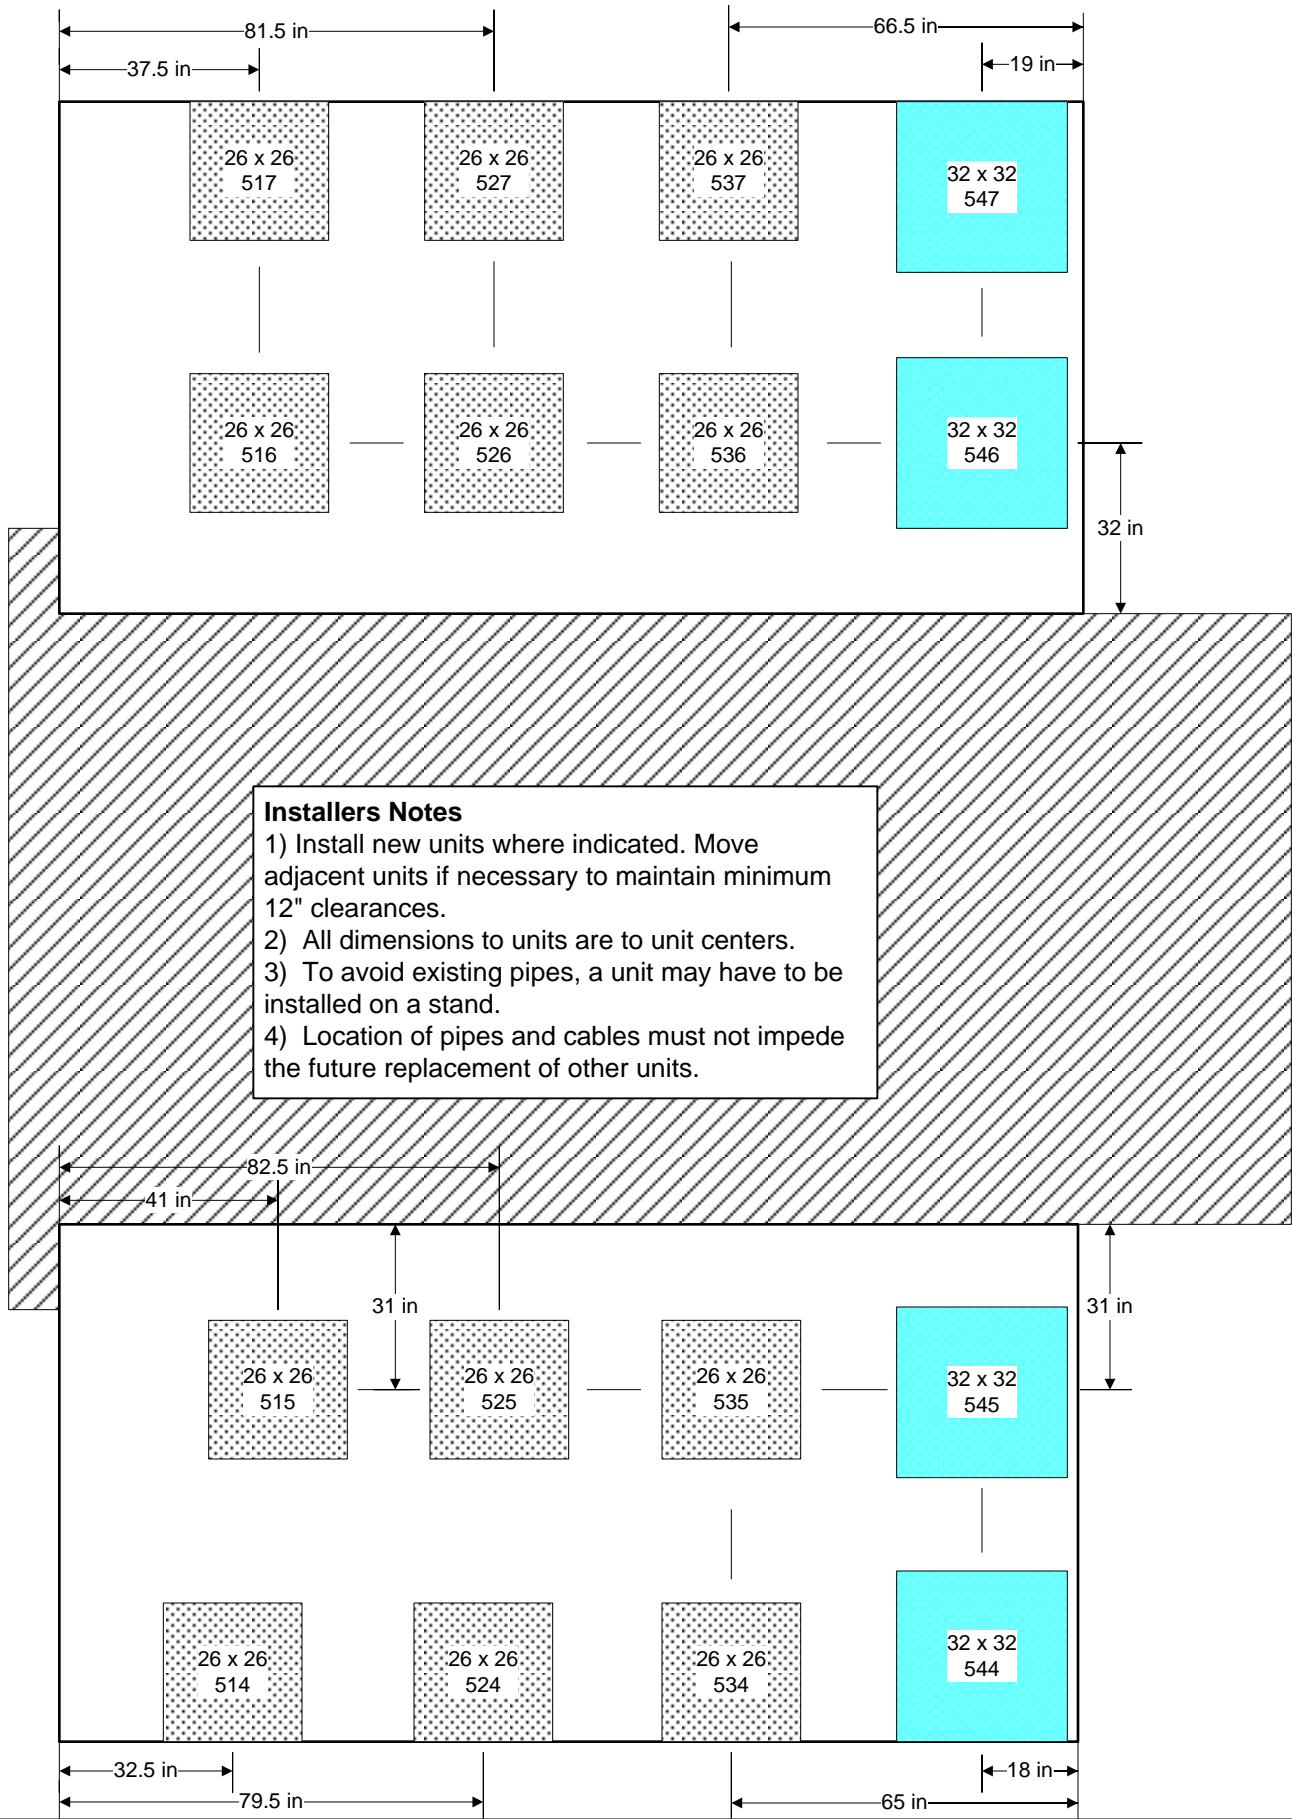


# ARC Specifications - Appendix 2

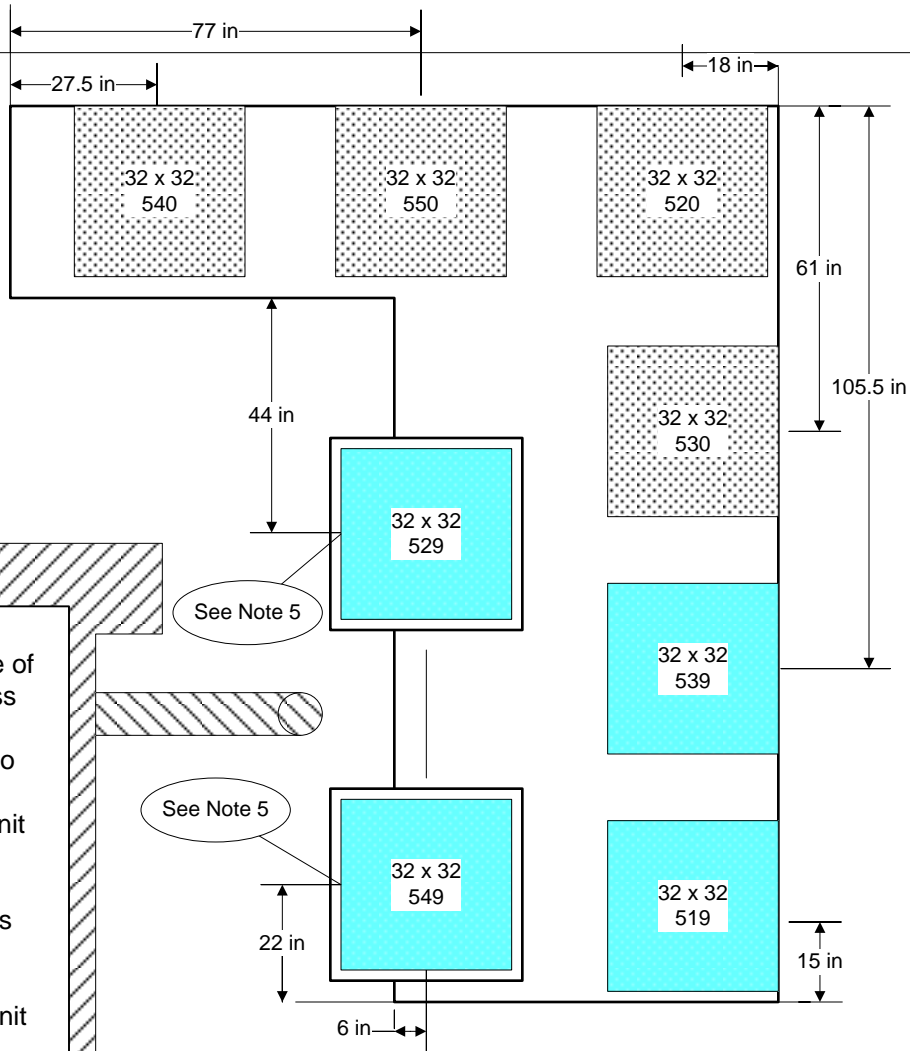


### Installers Notes

- 1) Install new units at the edge of the existing concrete pad unless otherwise indicated.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) For future unit clearances, unit must extend beyond existing concrete pad and will require a condenser unit pad.

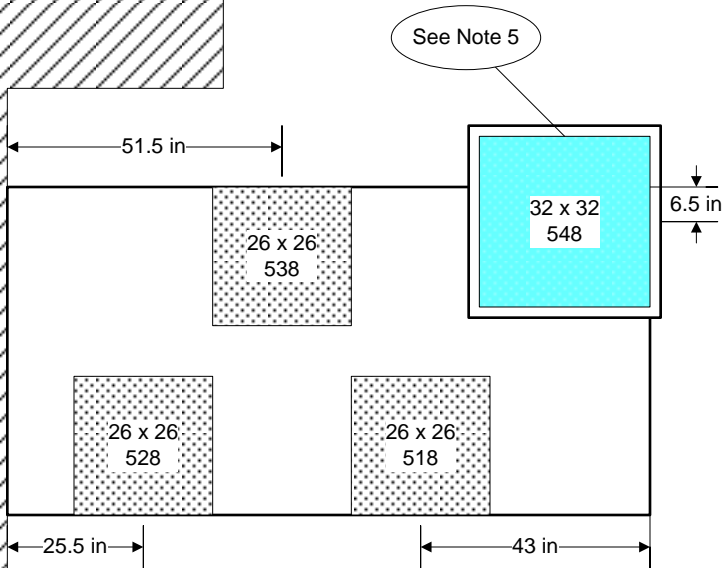


# ARC Specifications - Appendix 2

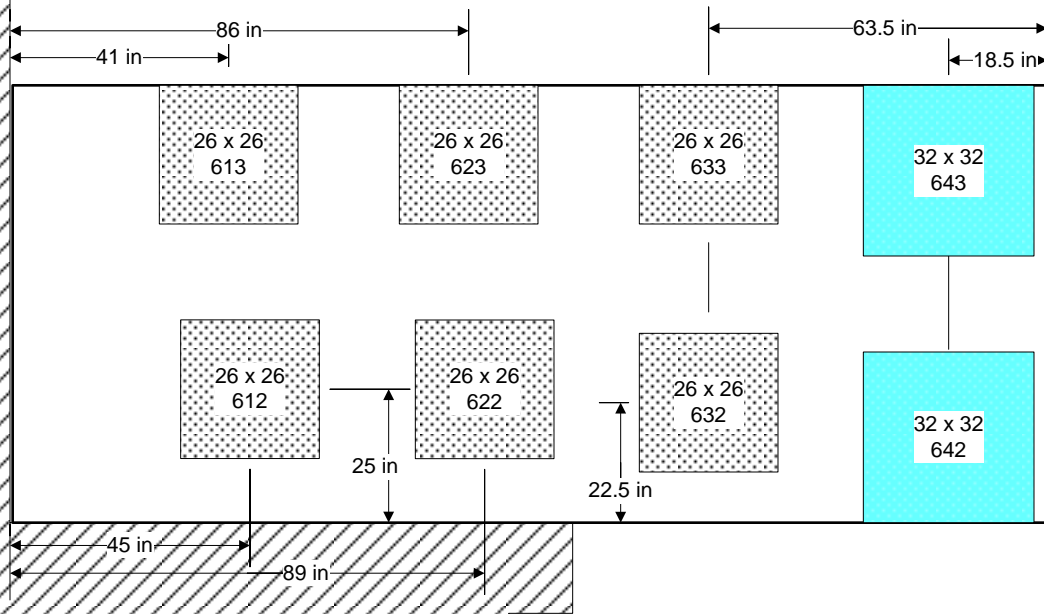


**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.

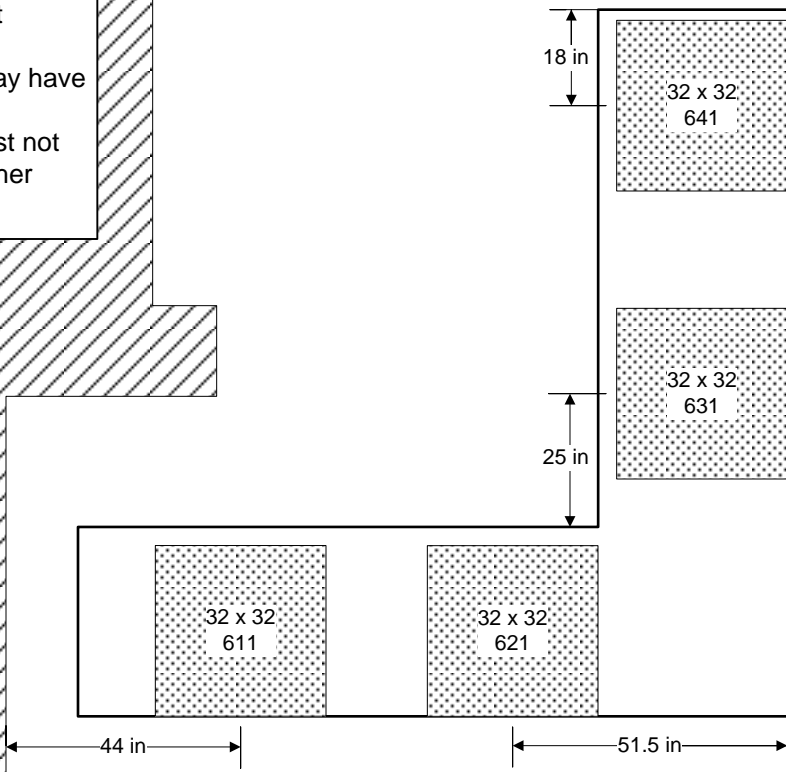




## ARC Specifications - Appendix 2

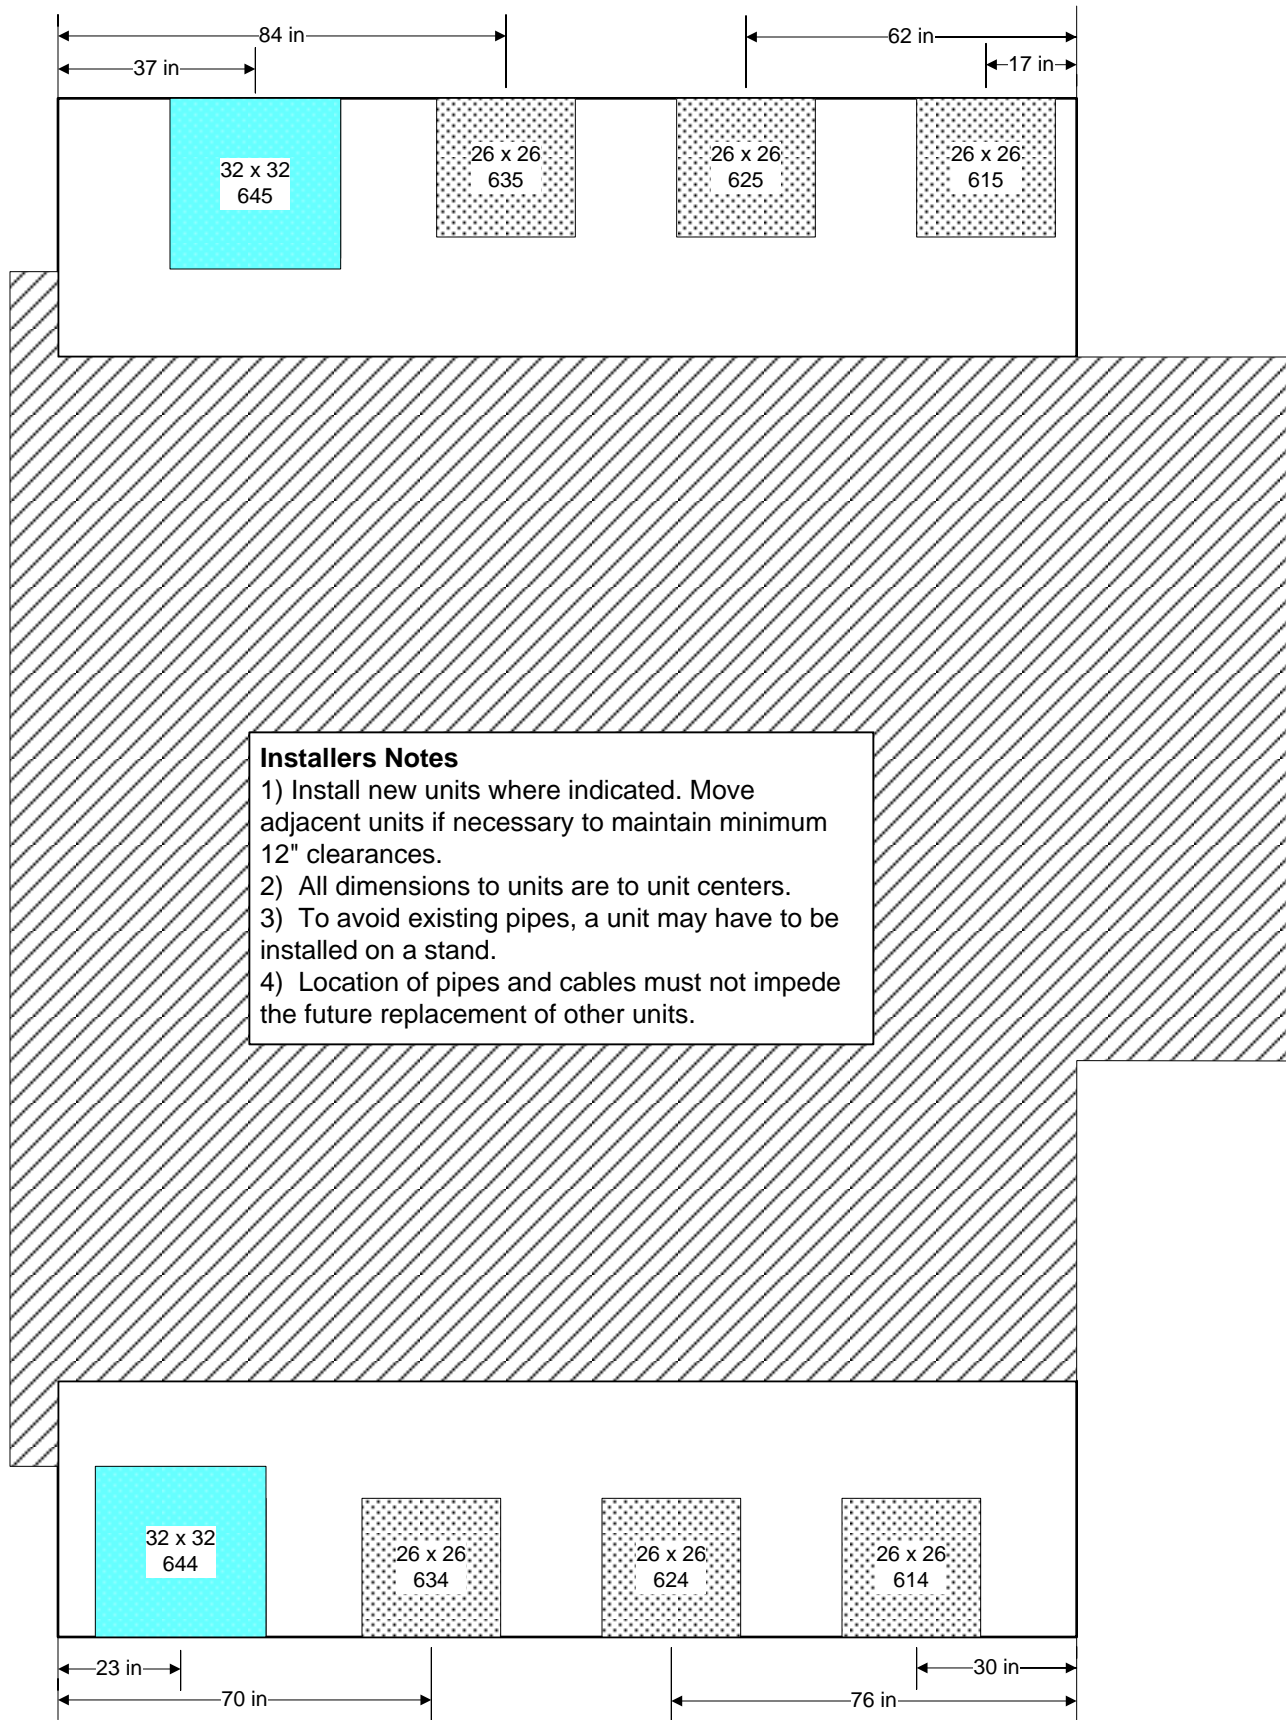


# ARC Specifications - Appendix 2

### Installers Notes


- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) For future unit clearances, unit must extend beyond existing concrete pad and may require a condenser unit pad.

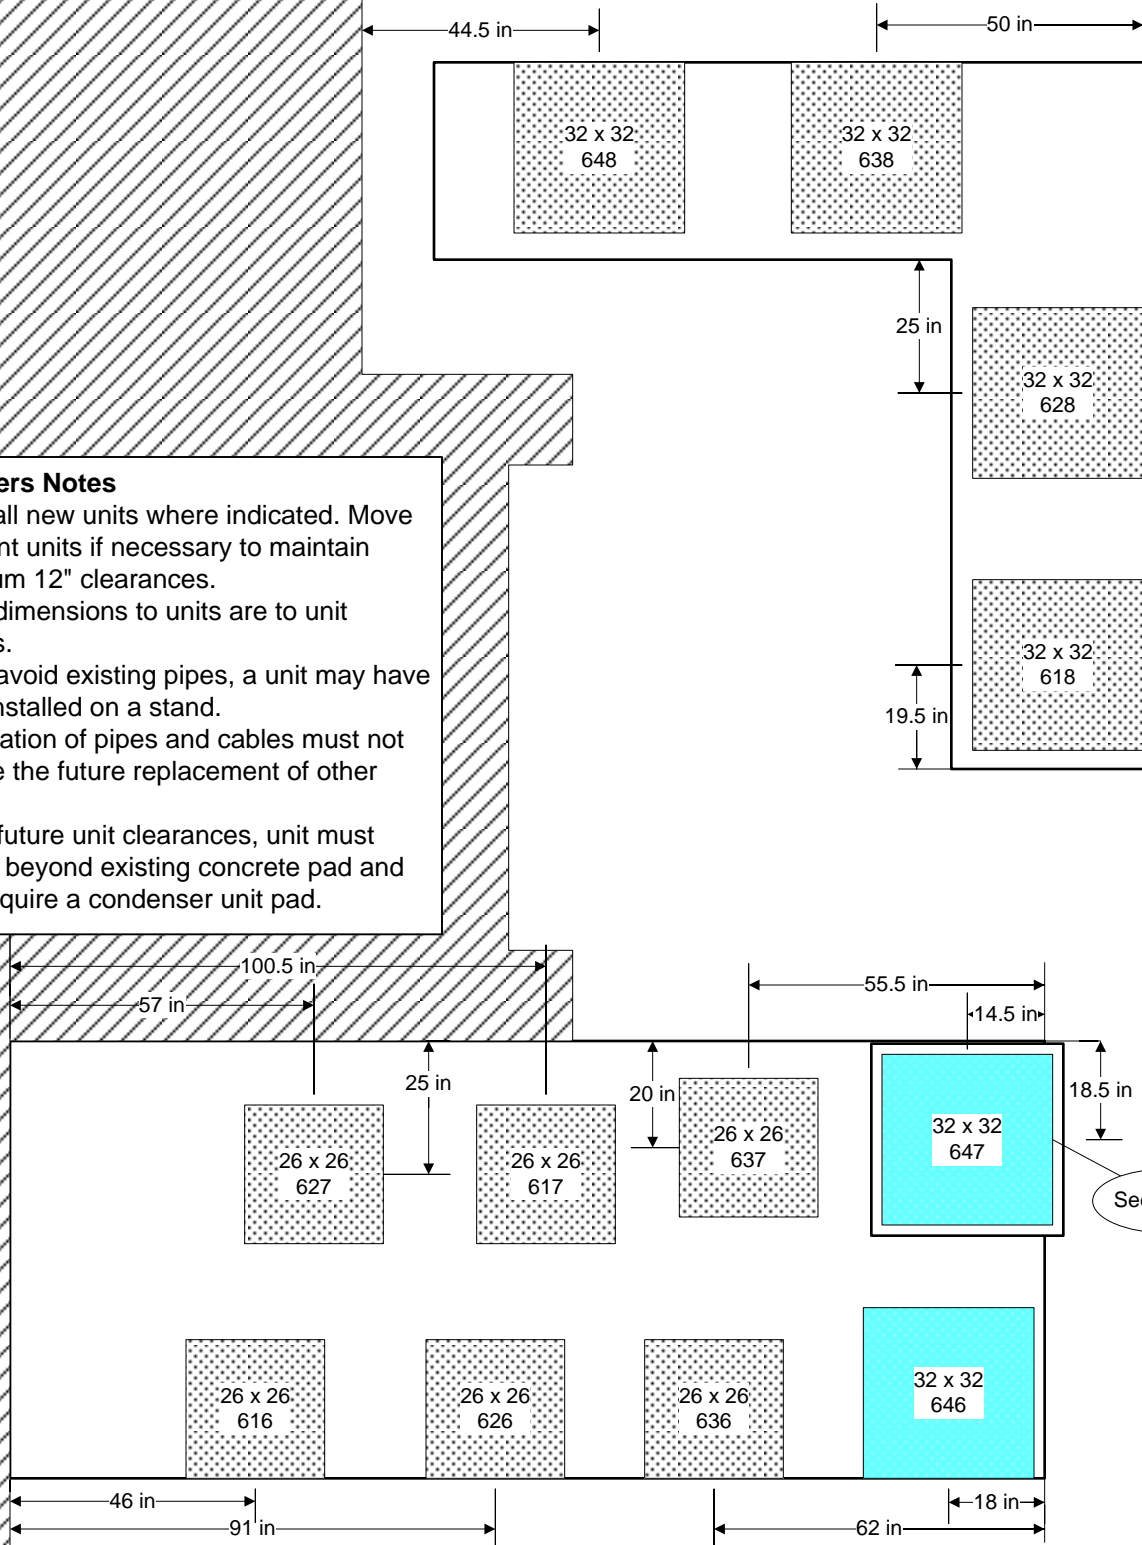

# ARC Specifications - Appendix 2

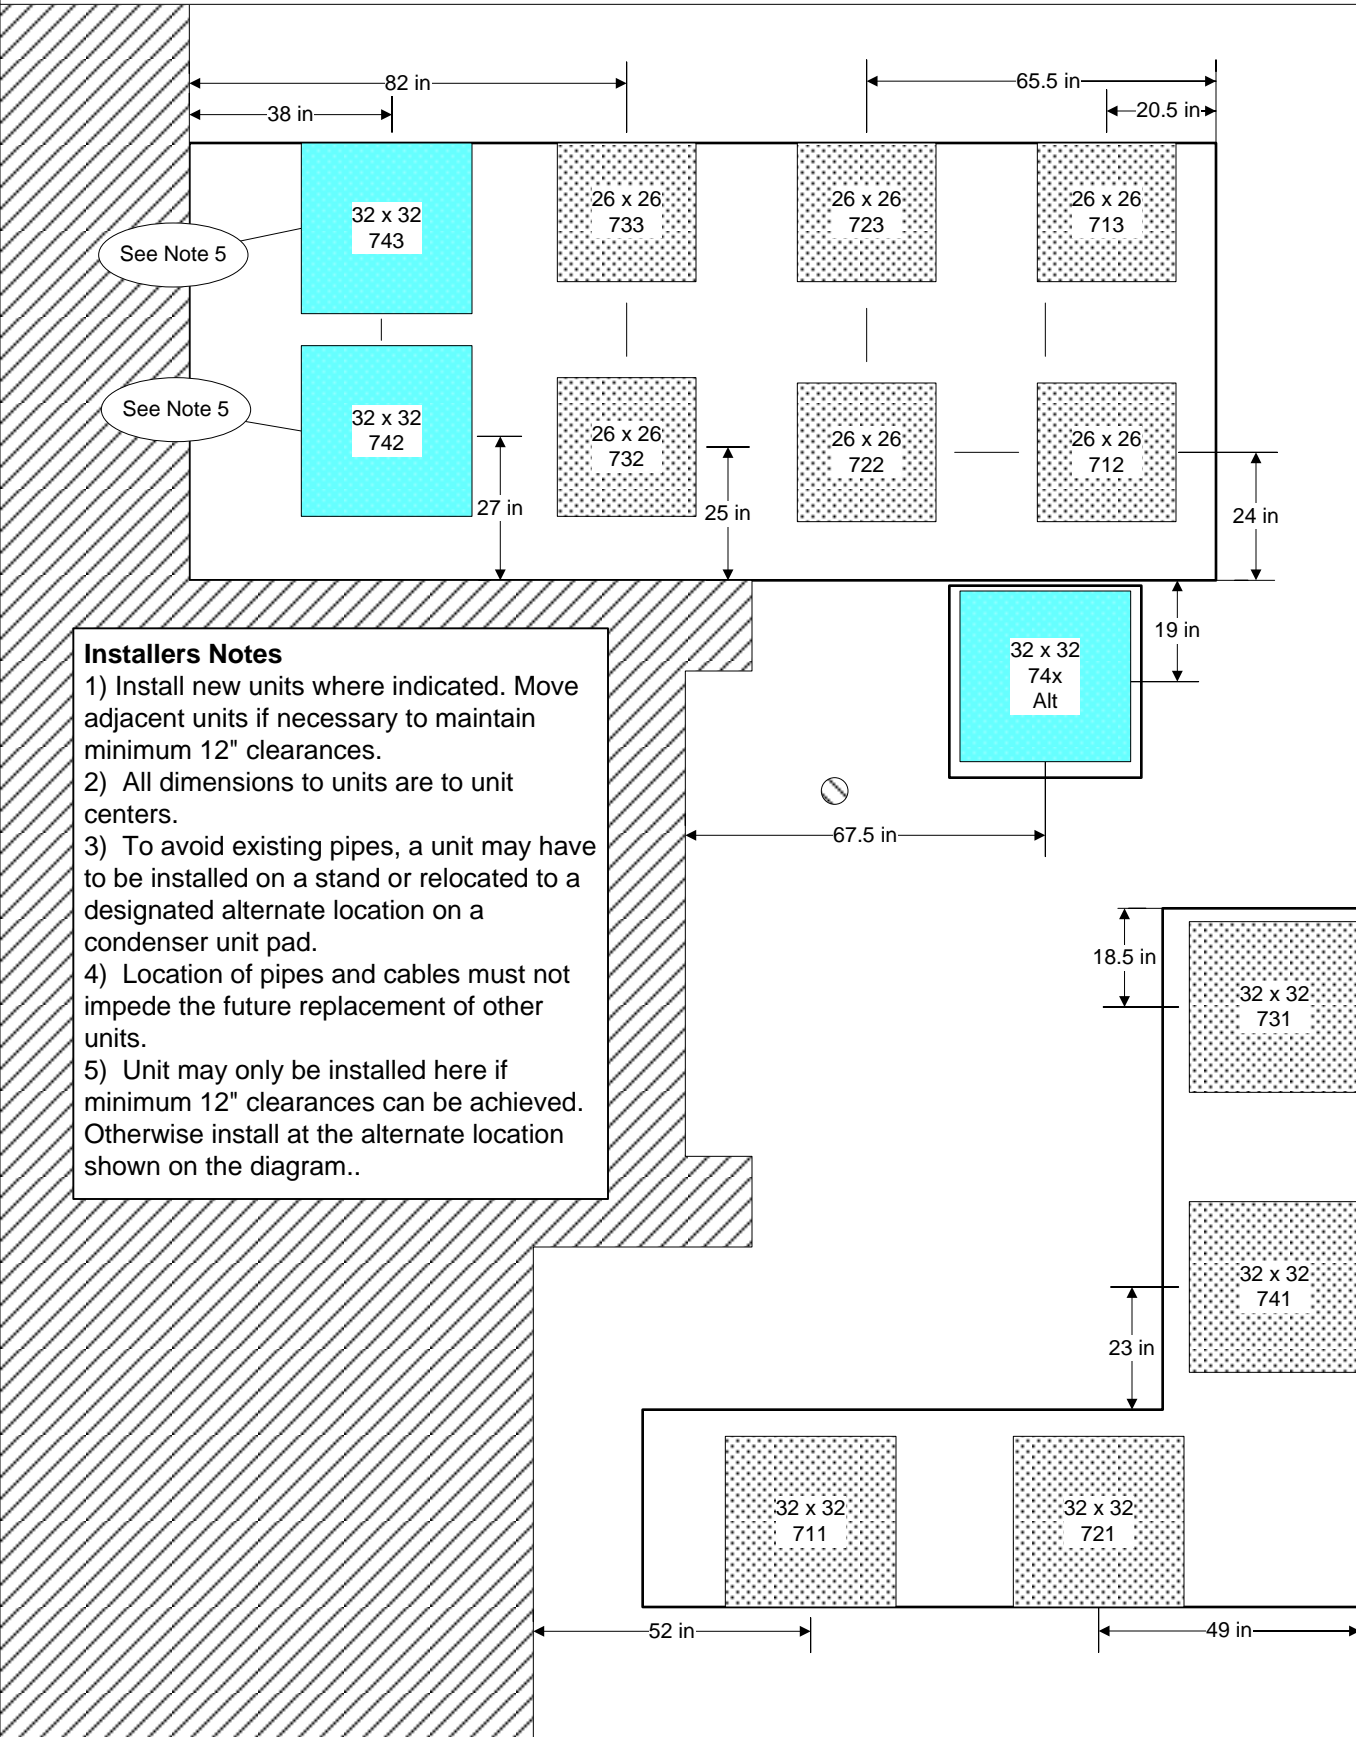




## ARC Specifications - Appendix 2

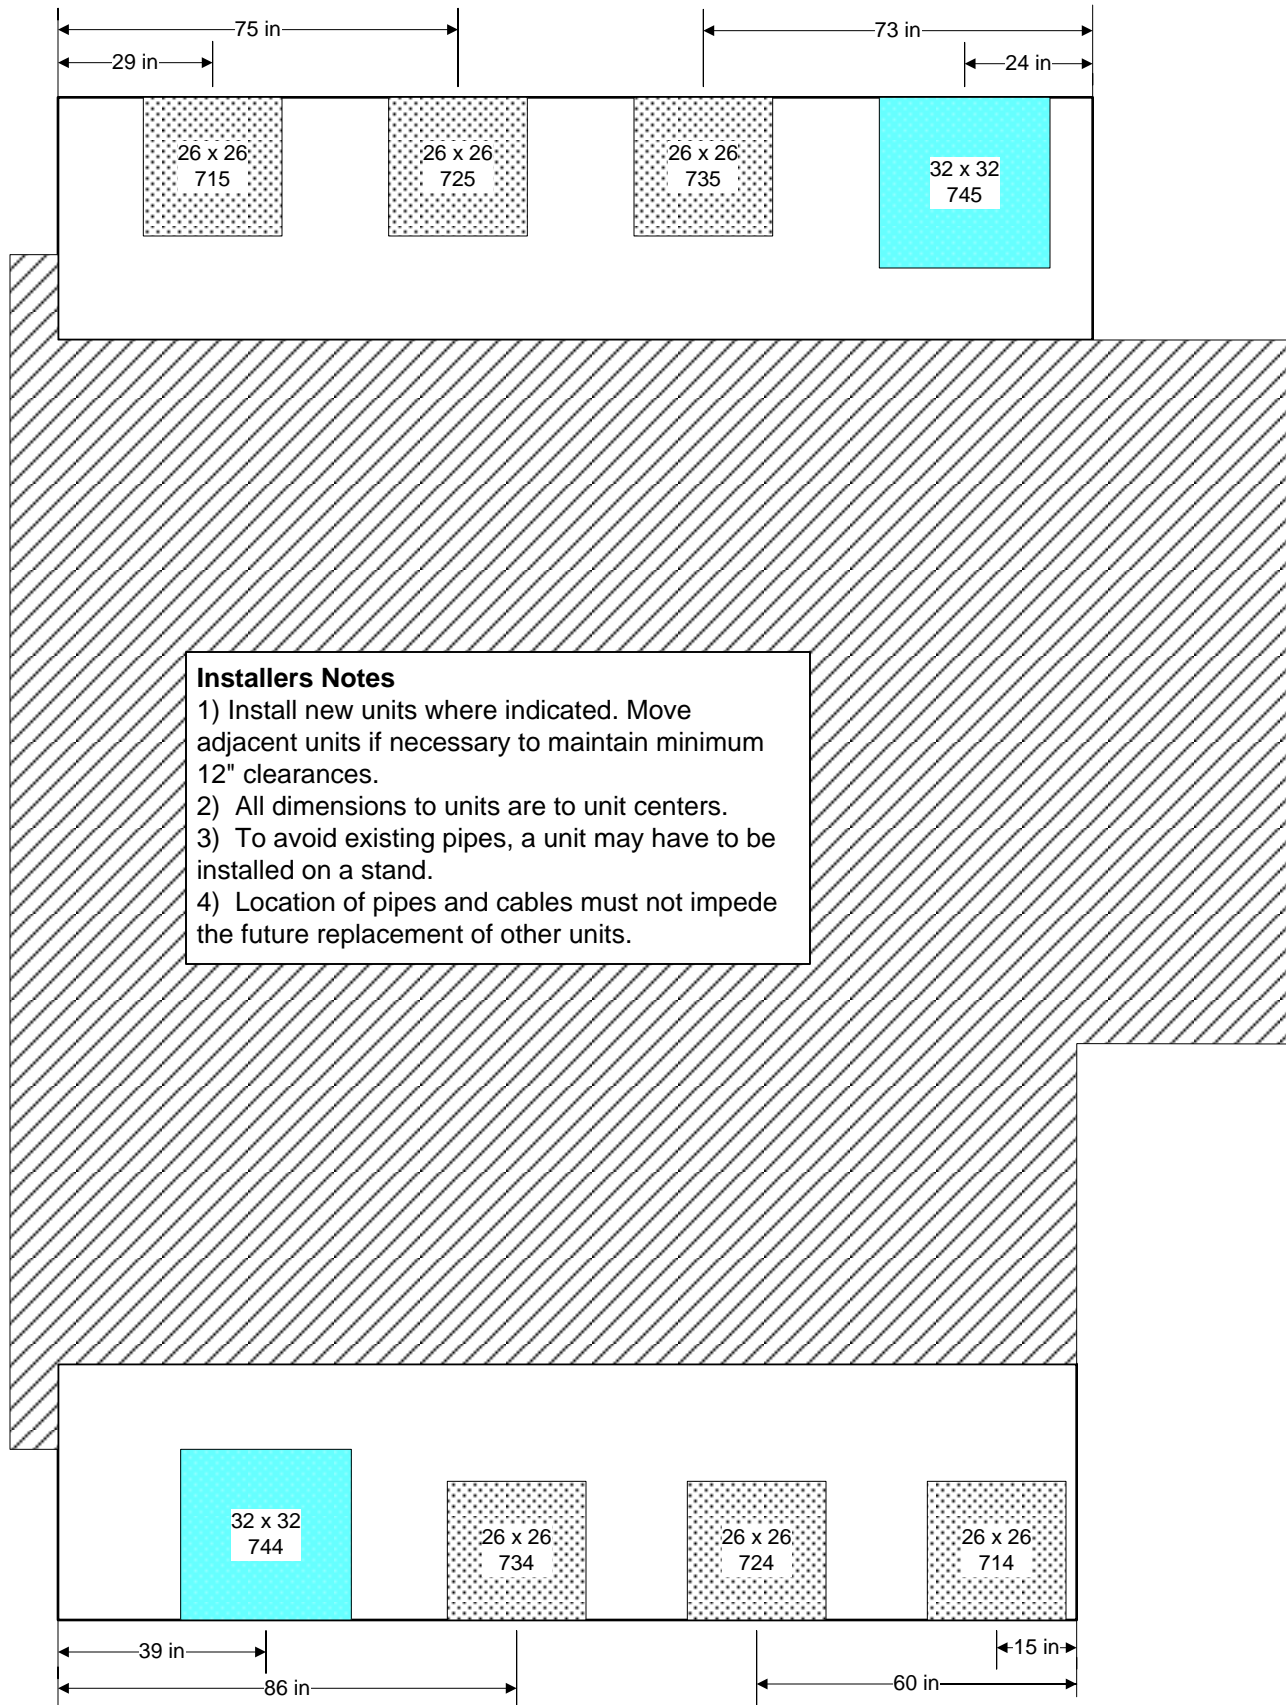

# ARC Specifications - Appendix 2

## Installers Notes


- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

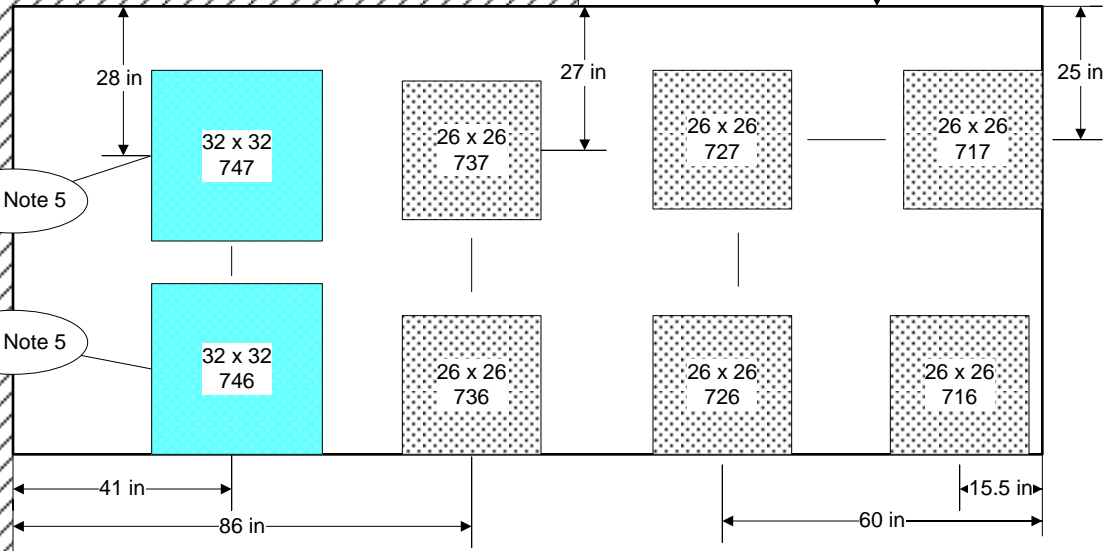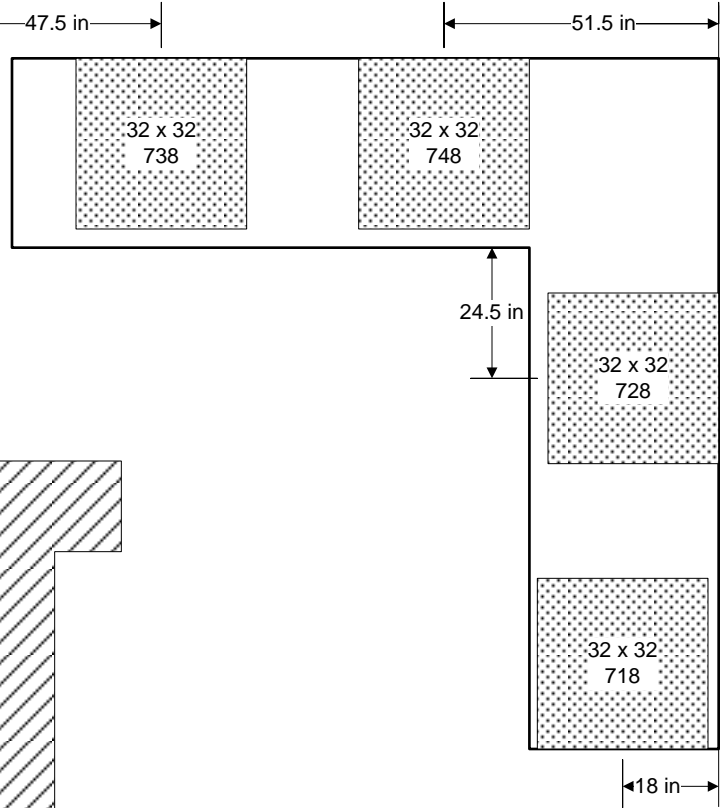

See Note 5

See Note 5


# ARC Specifications - Appendix 2

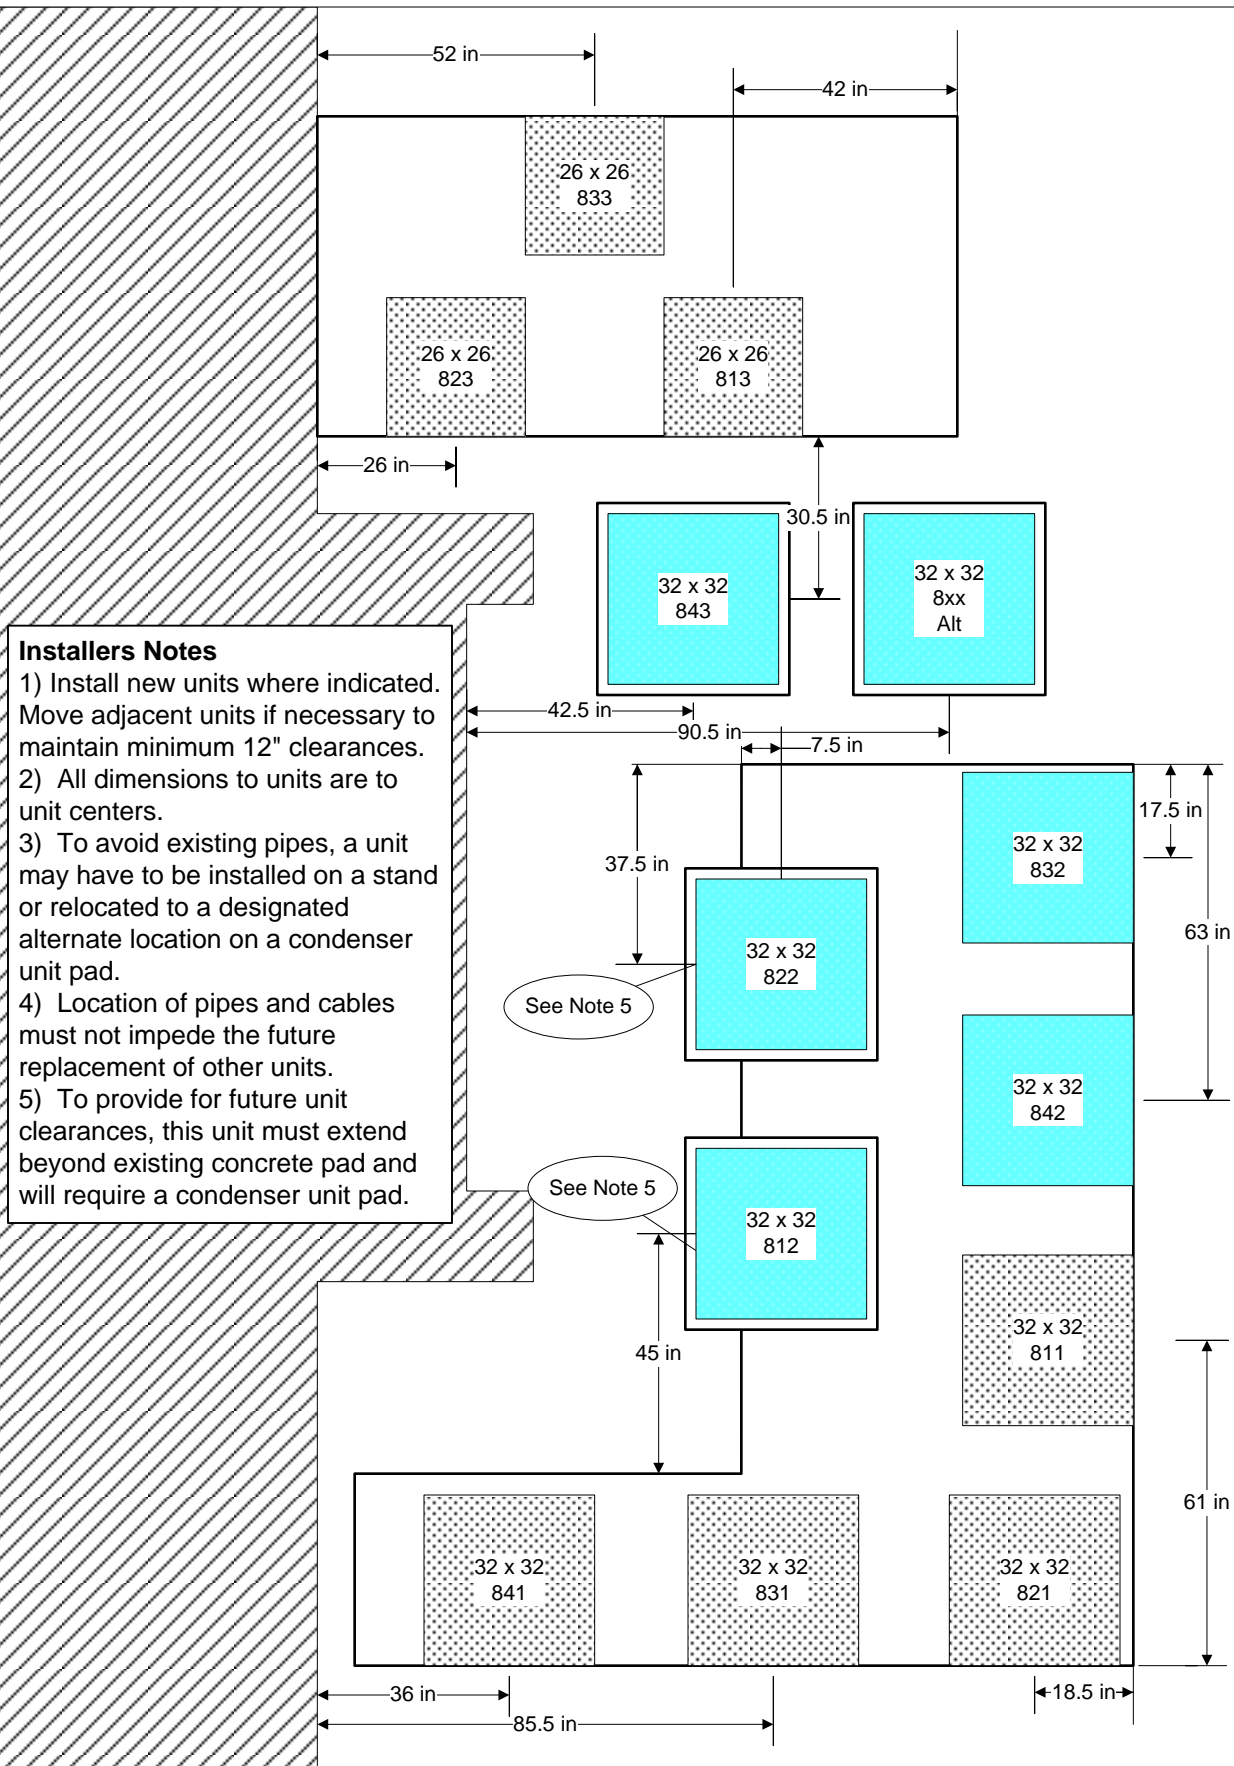

**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.


# ARC Specifications - Appendix 2

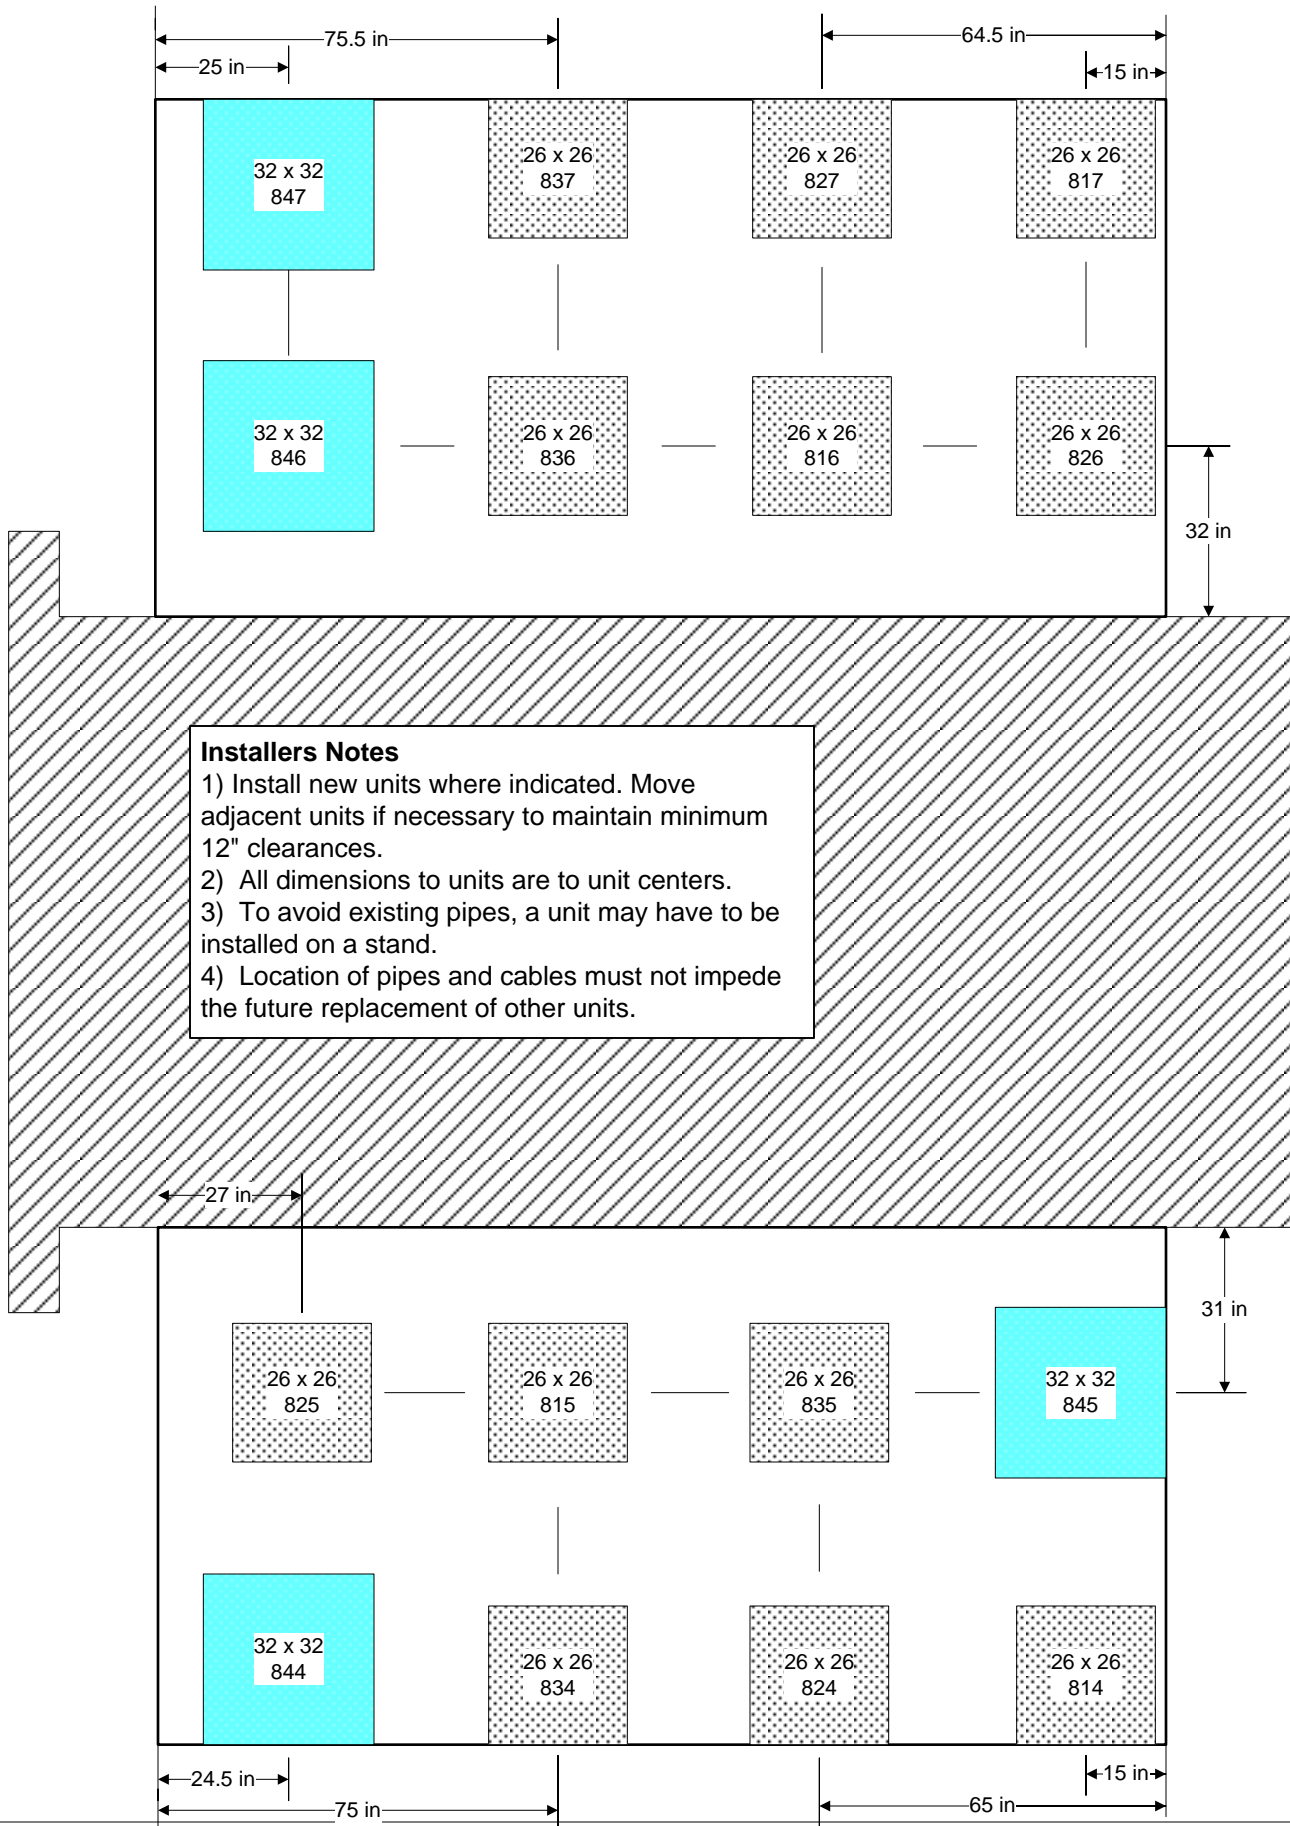

# ARC Specifications - Appendix 2


**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.
- 6) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

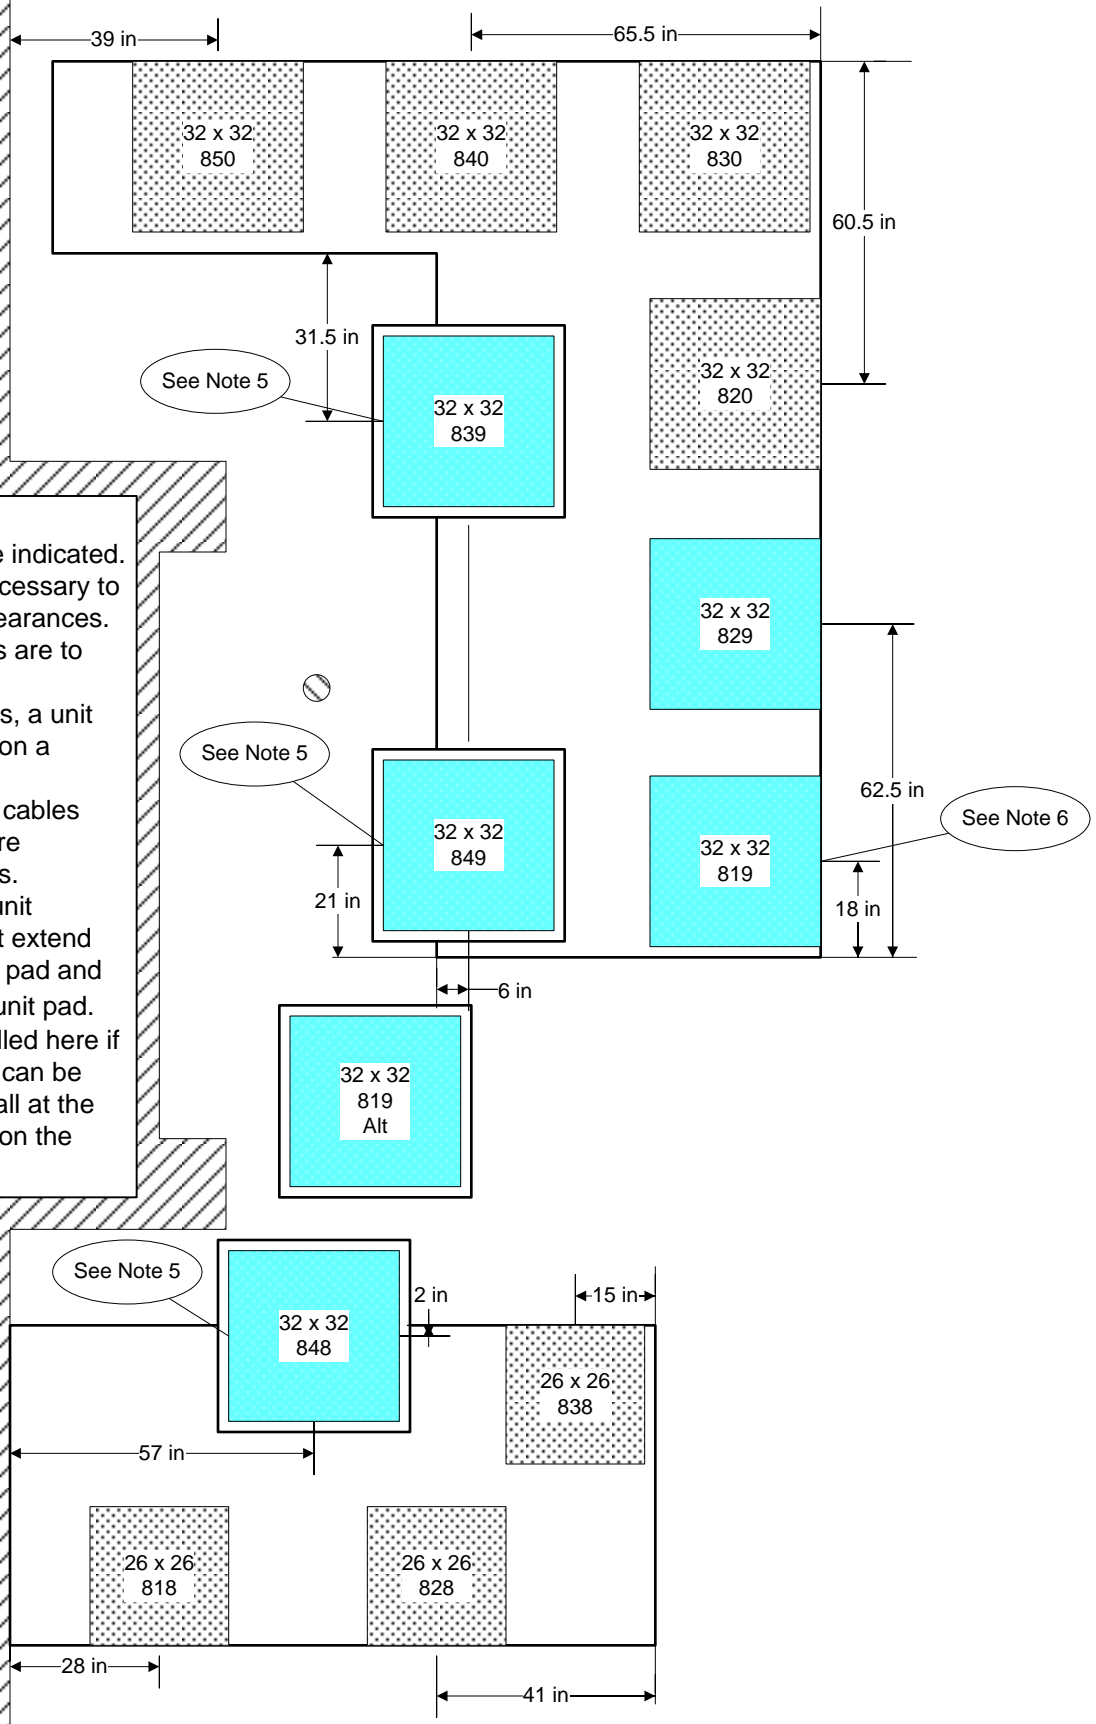




# ARC Specifications - Appendix 2

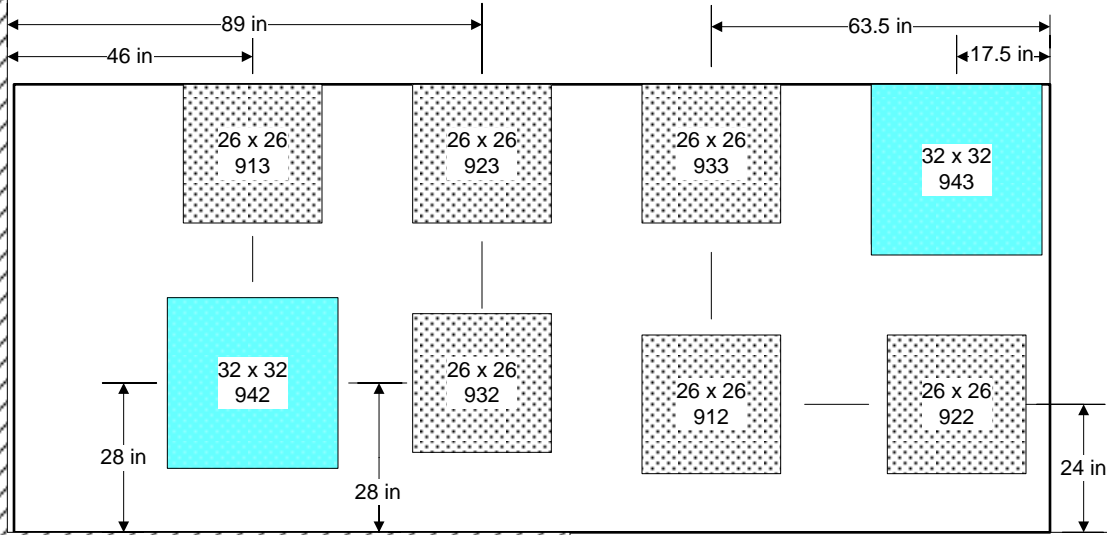


### Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.

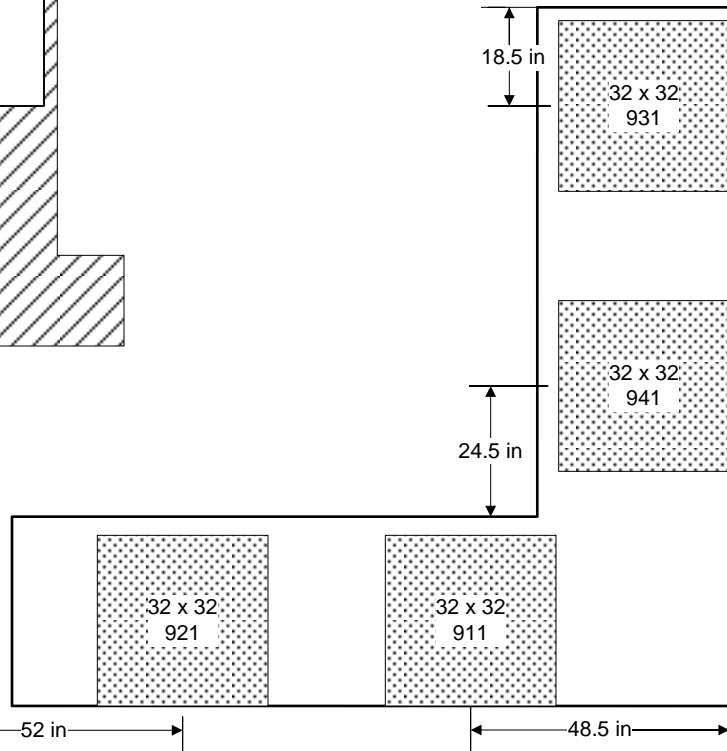



## ARC Specifications - Appendix 2

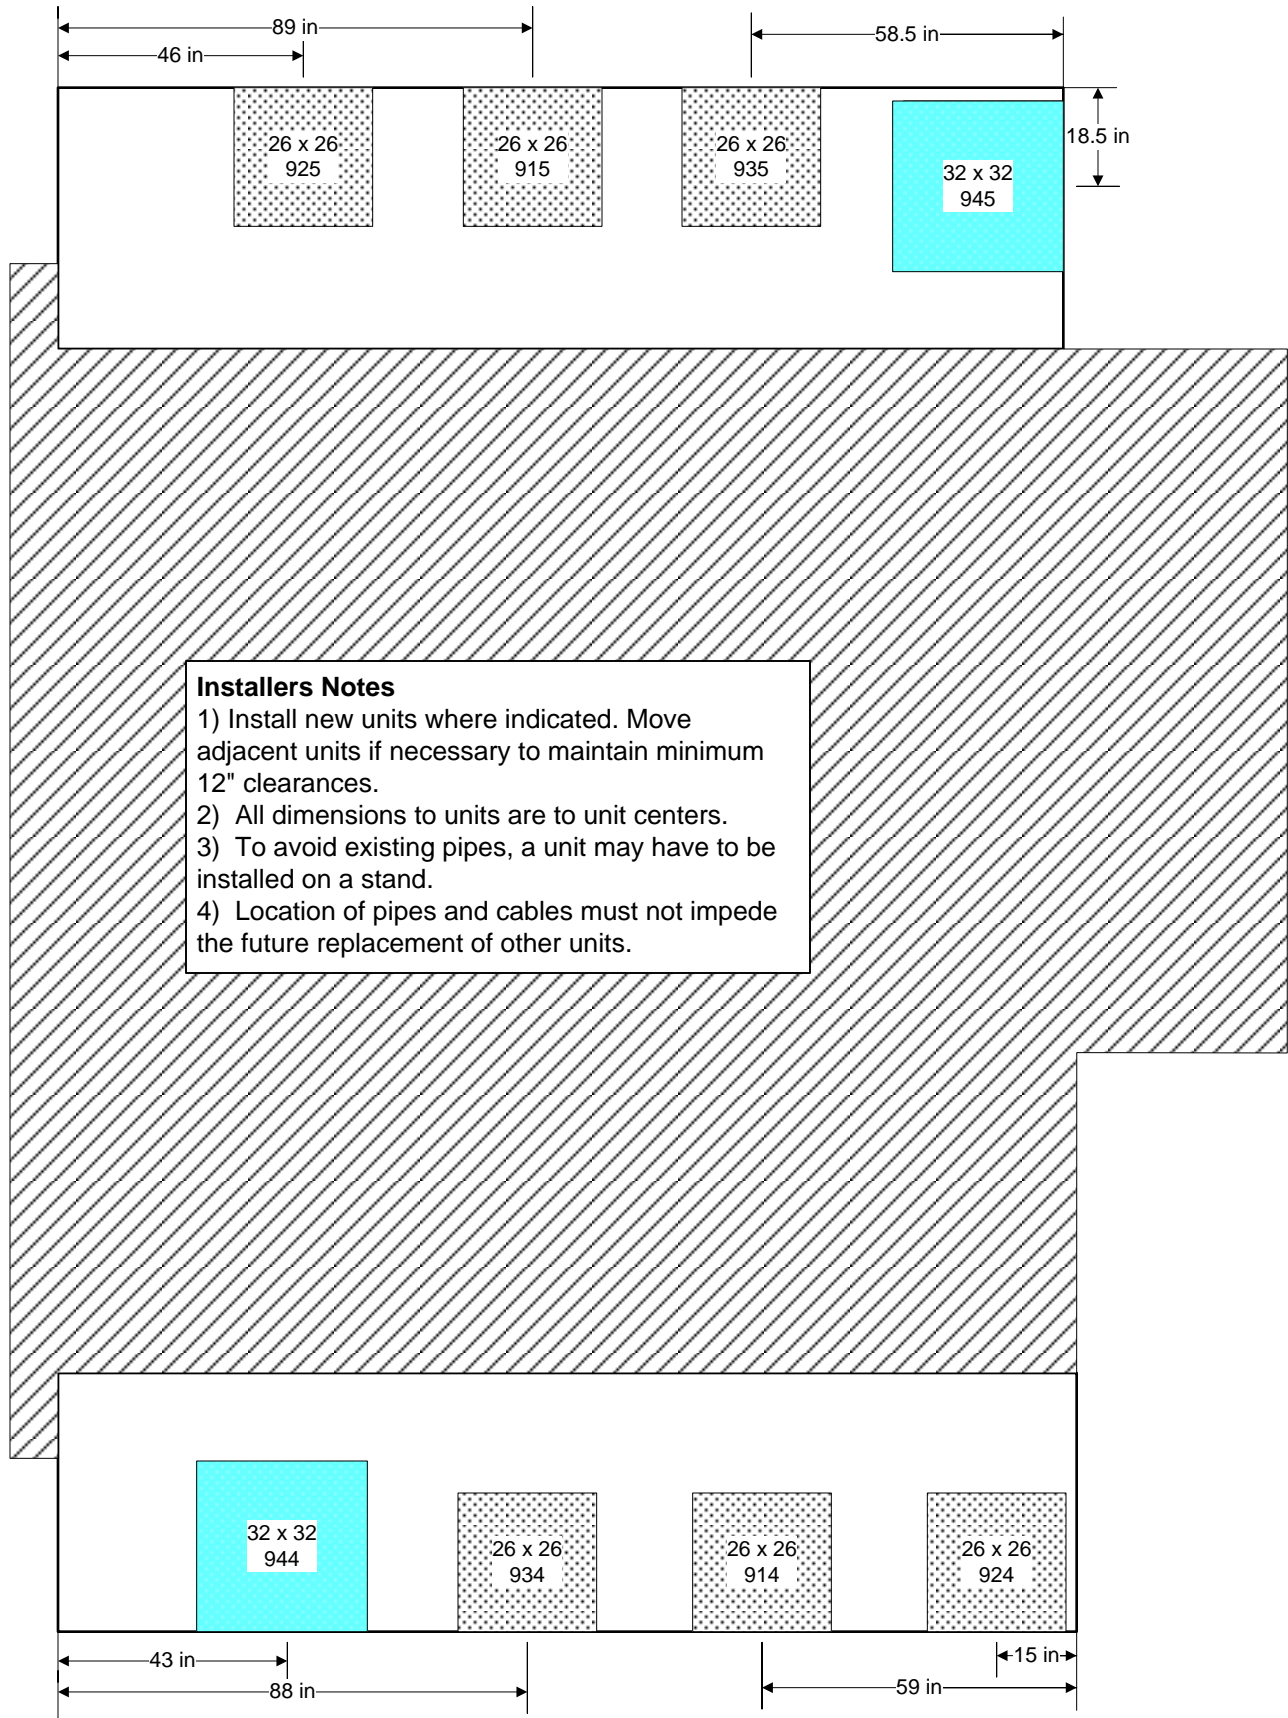


# ARC Specifications - Appendix 2

**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand.
- 4) Location of pipes and cables must not impede the future replacement of other units.

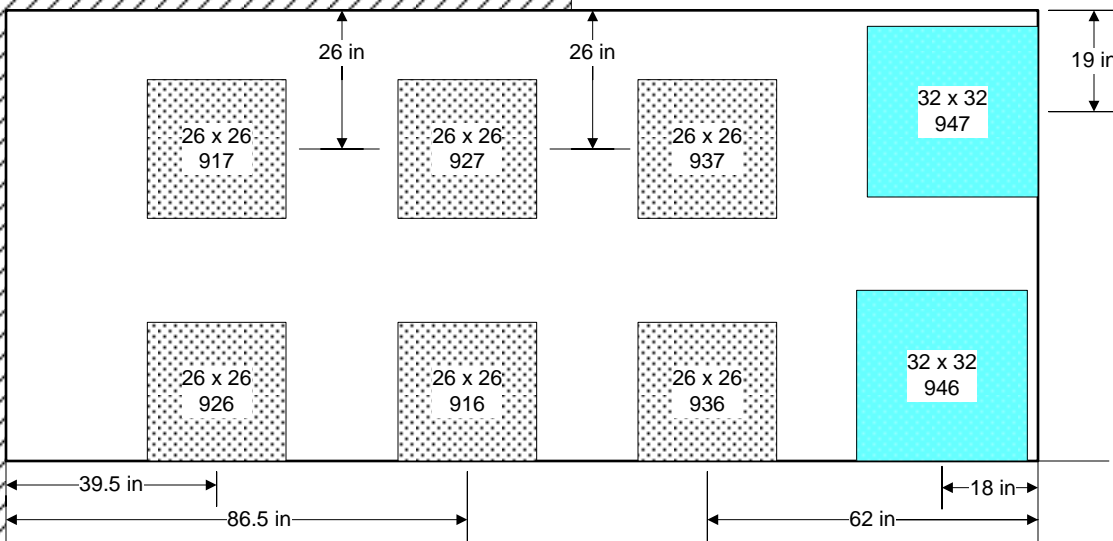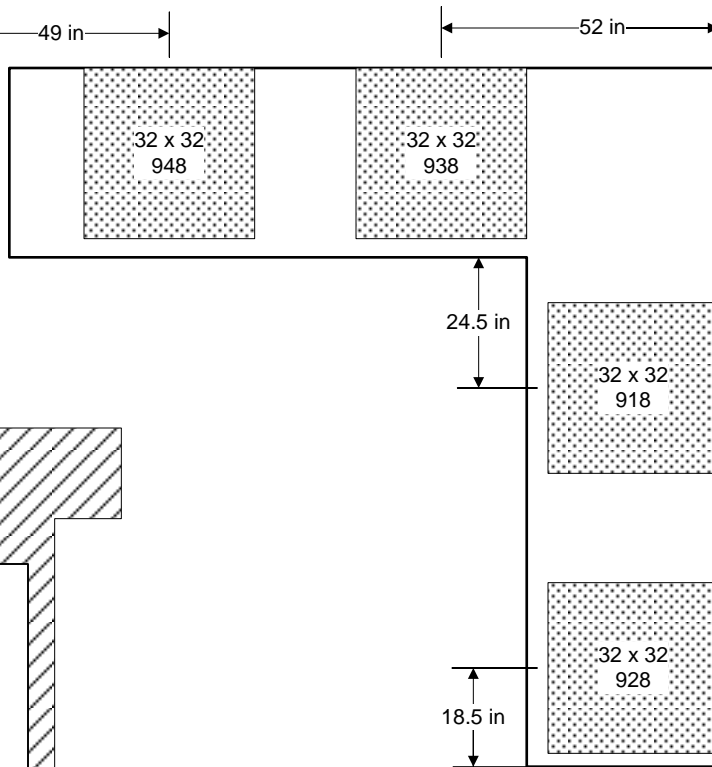


# ARC Specifications - Appendix 2

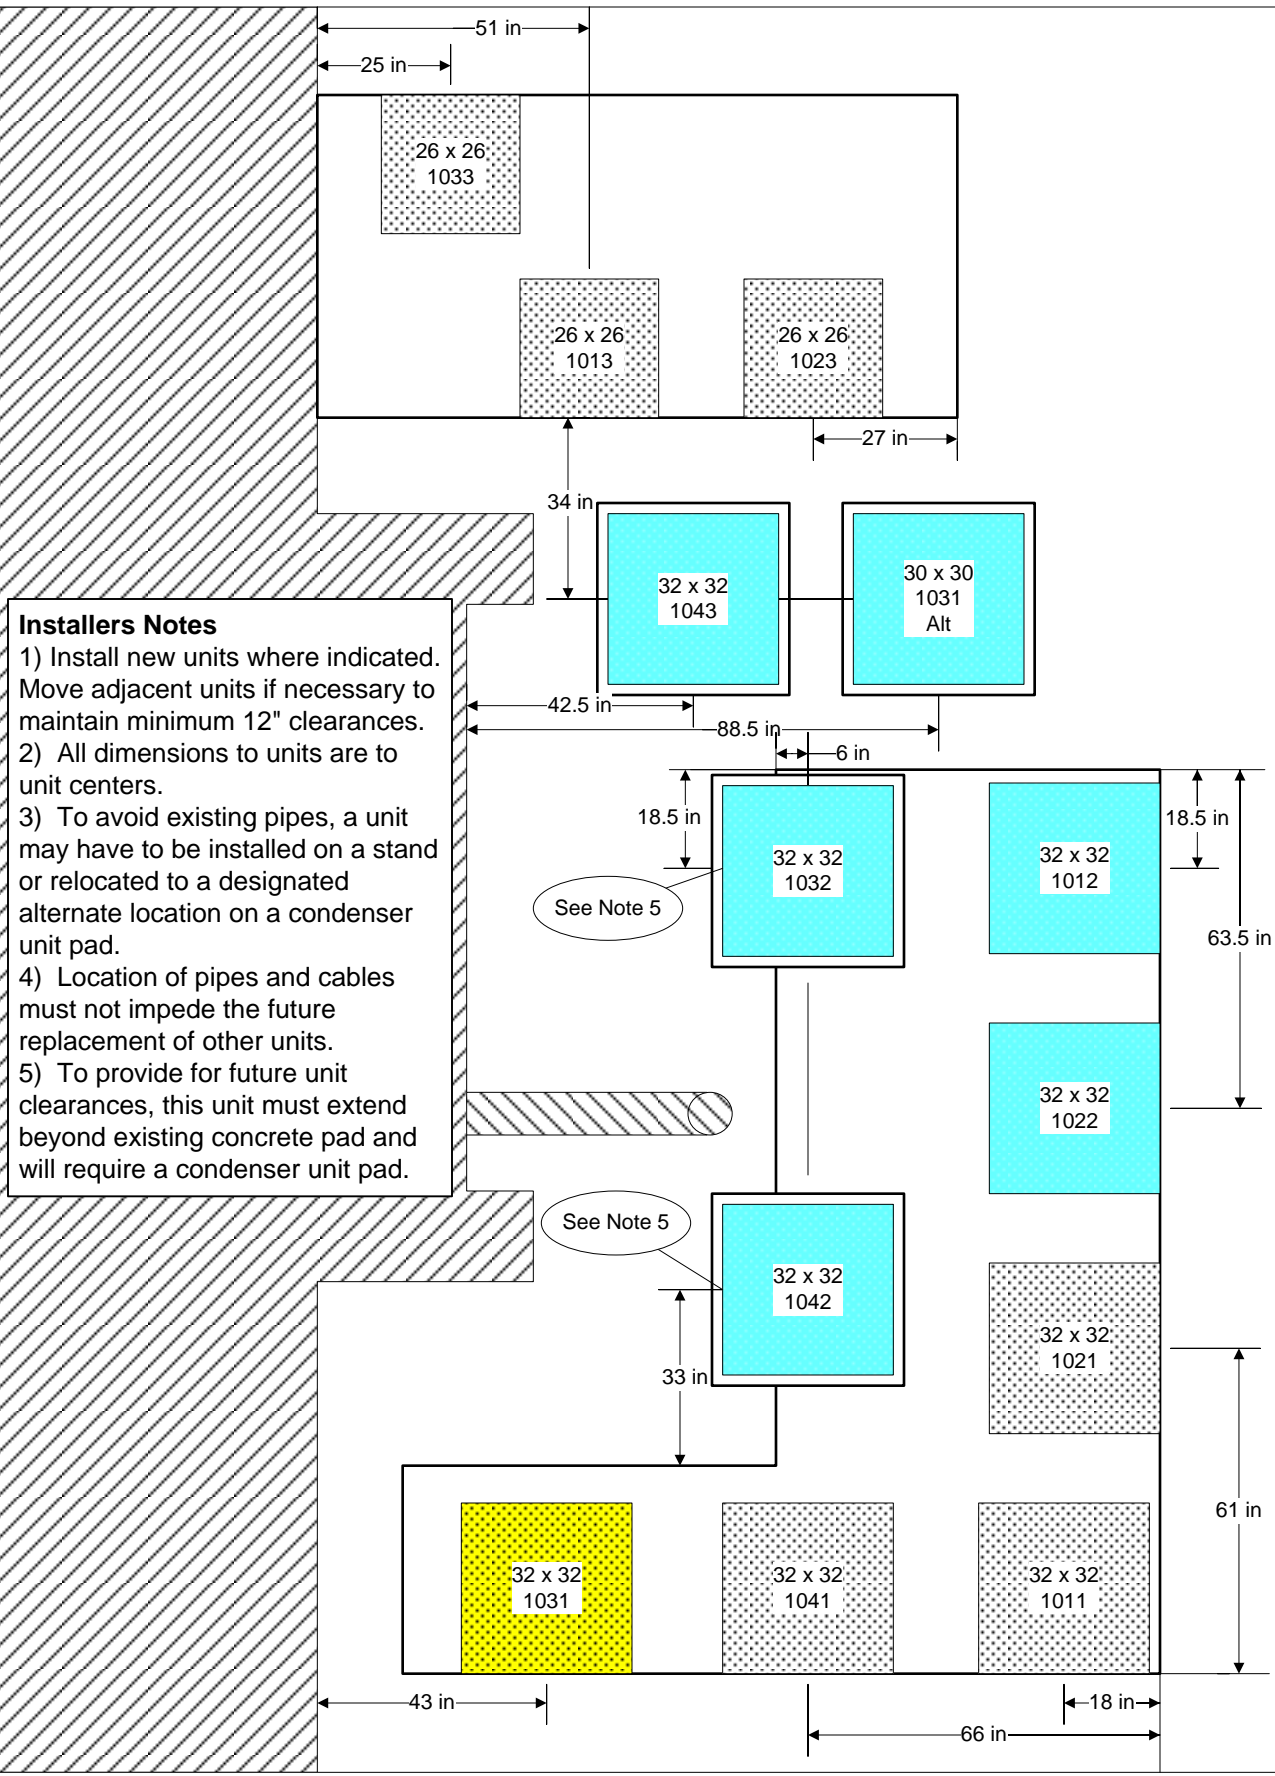

**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.


# ARC Specifications - Appendix 2

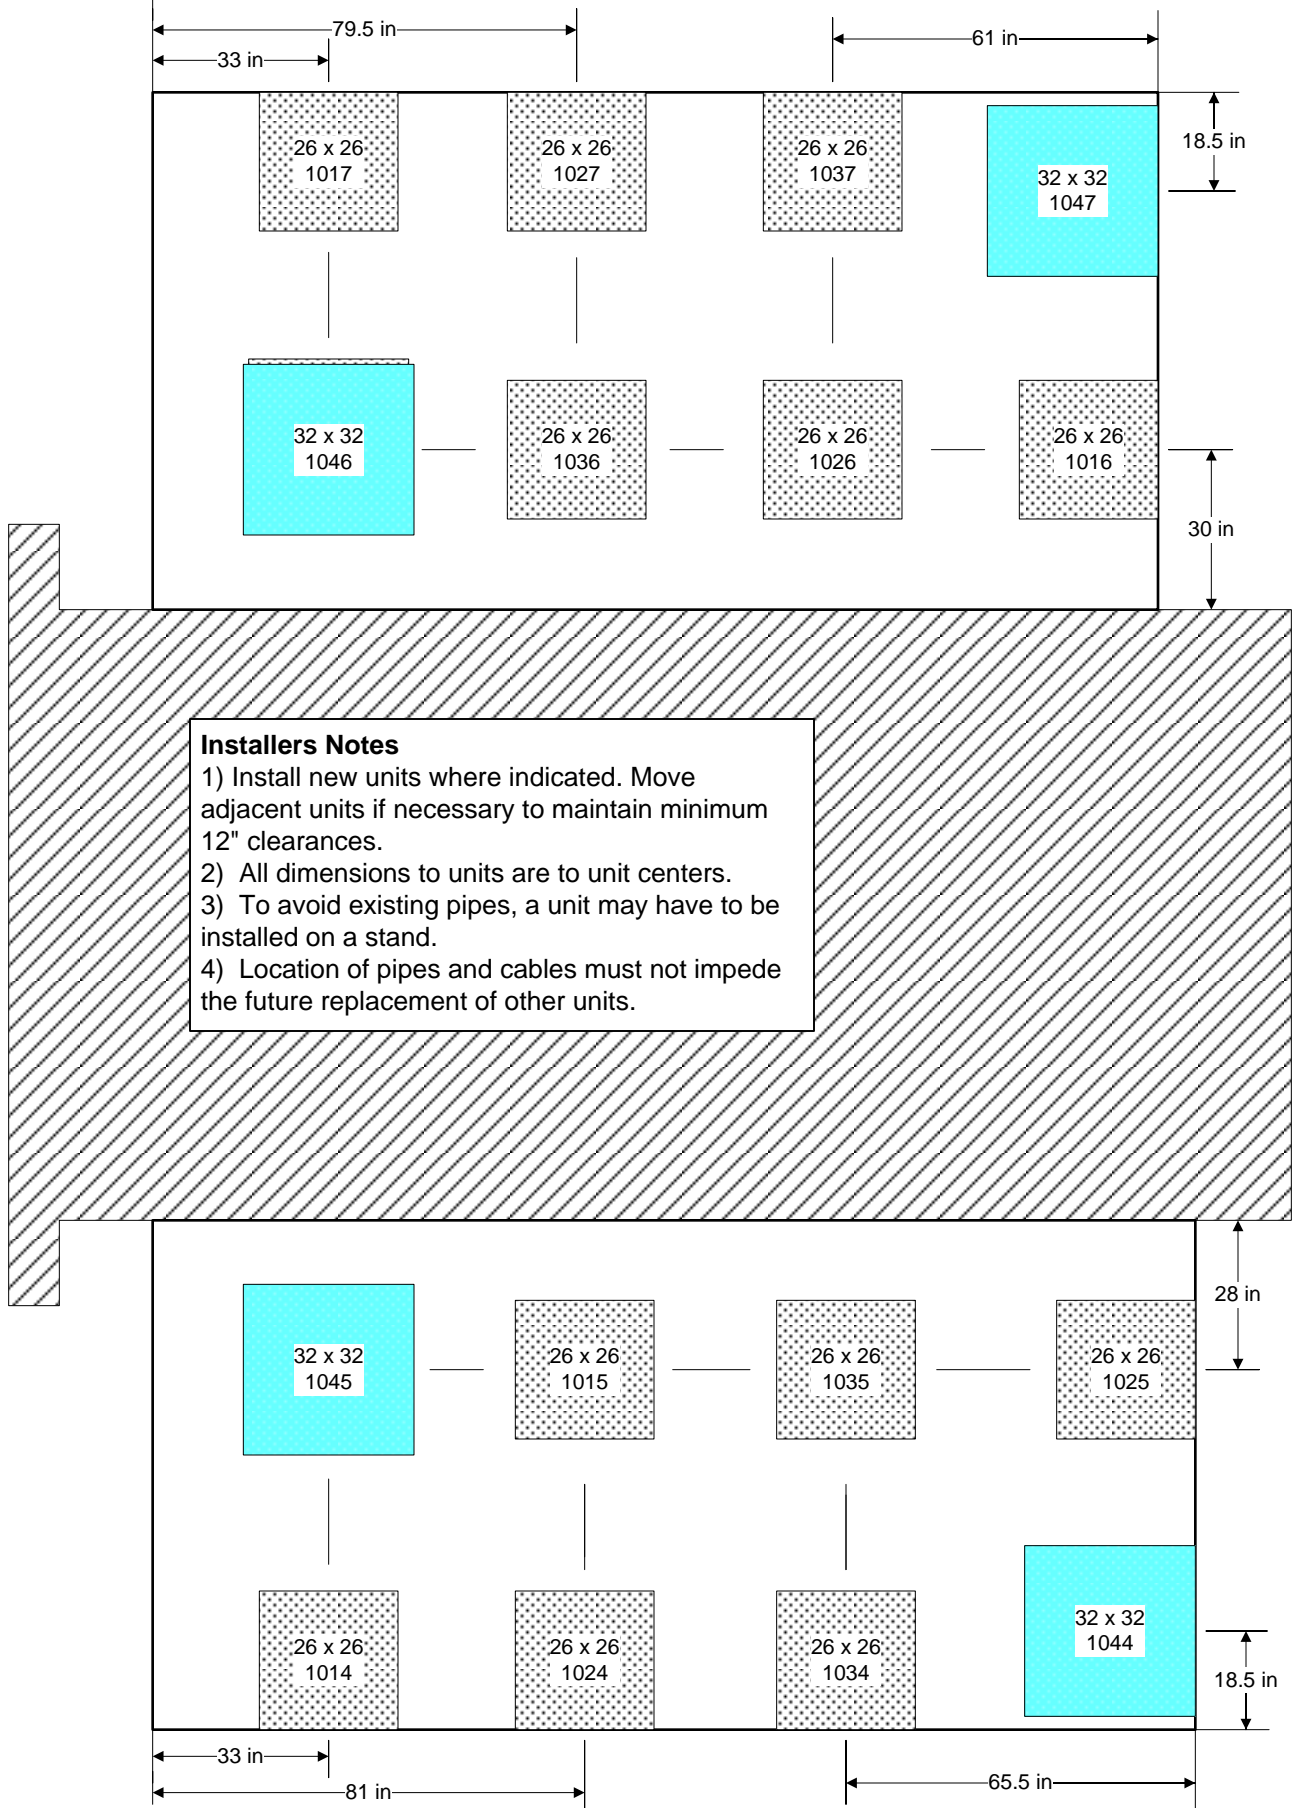


# ARC Specifications - Appendix 2

**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.

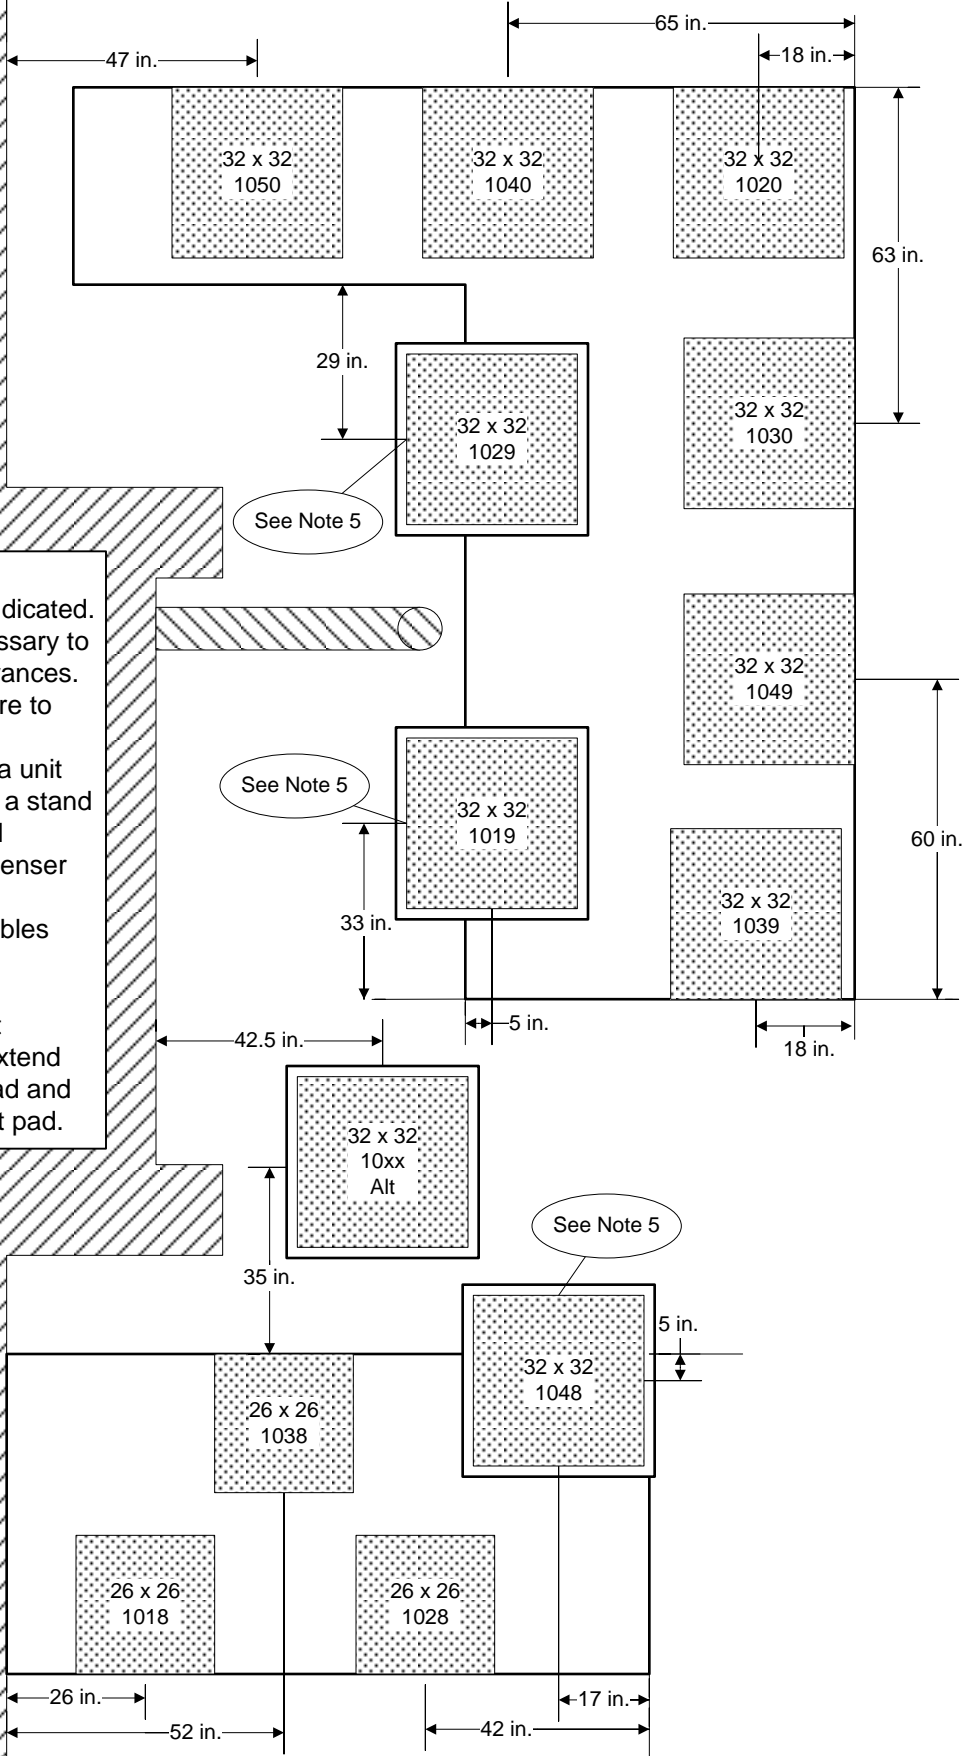


# ARC Specifications - Appendix 2

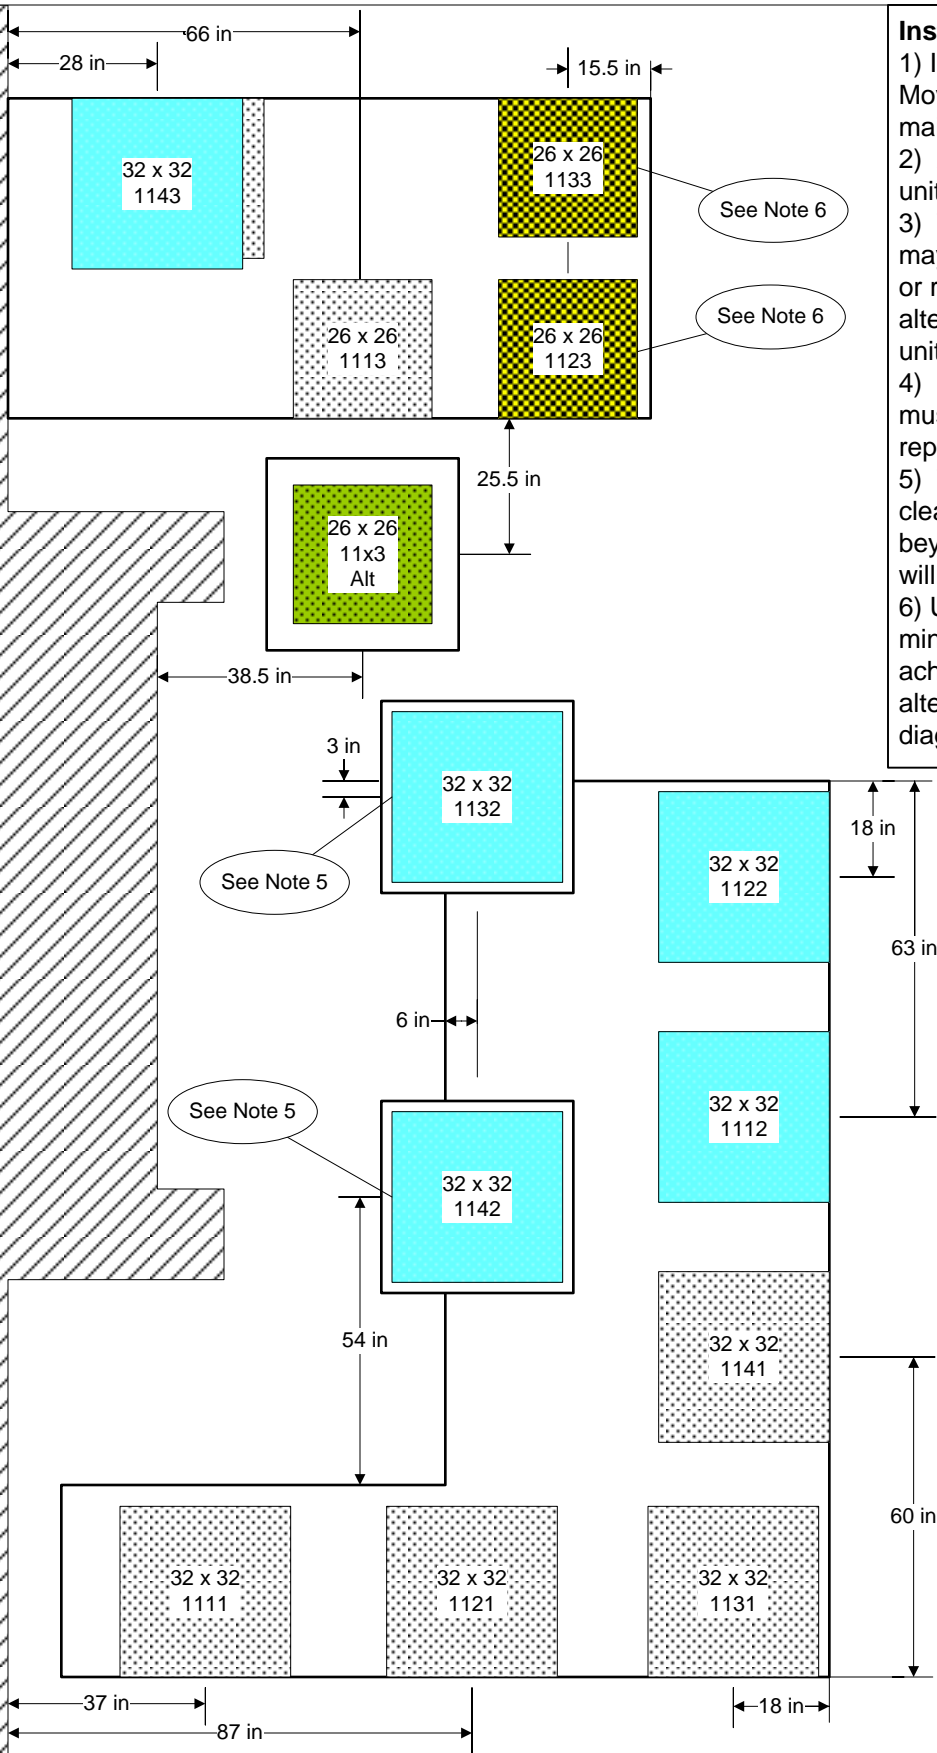

## Installers Notes

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.
- 6) Unit may only be installed here if minimum 12" clearances can be achieved. Otherwise install at the alternate location shown on the diagram.

# ARC Specifications - Appendix 2

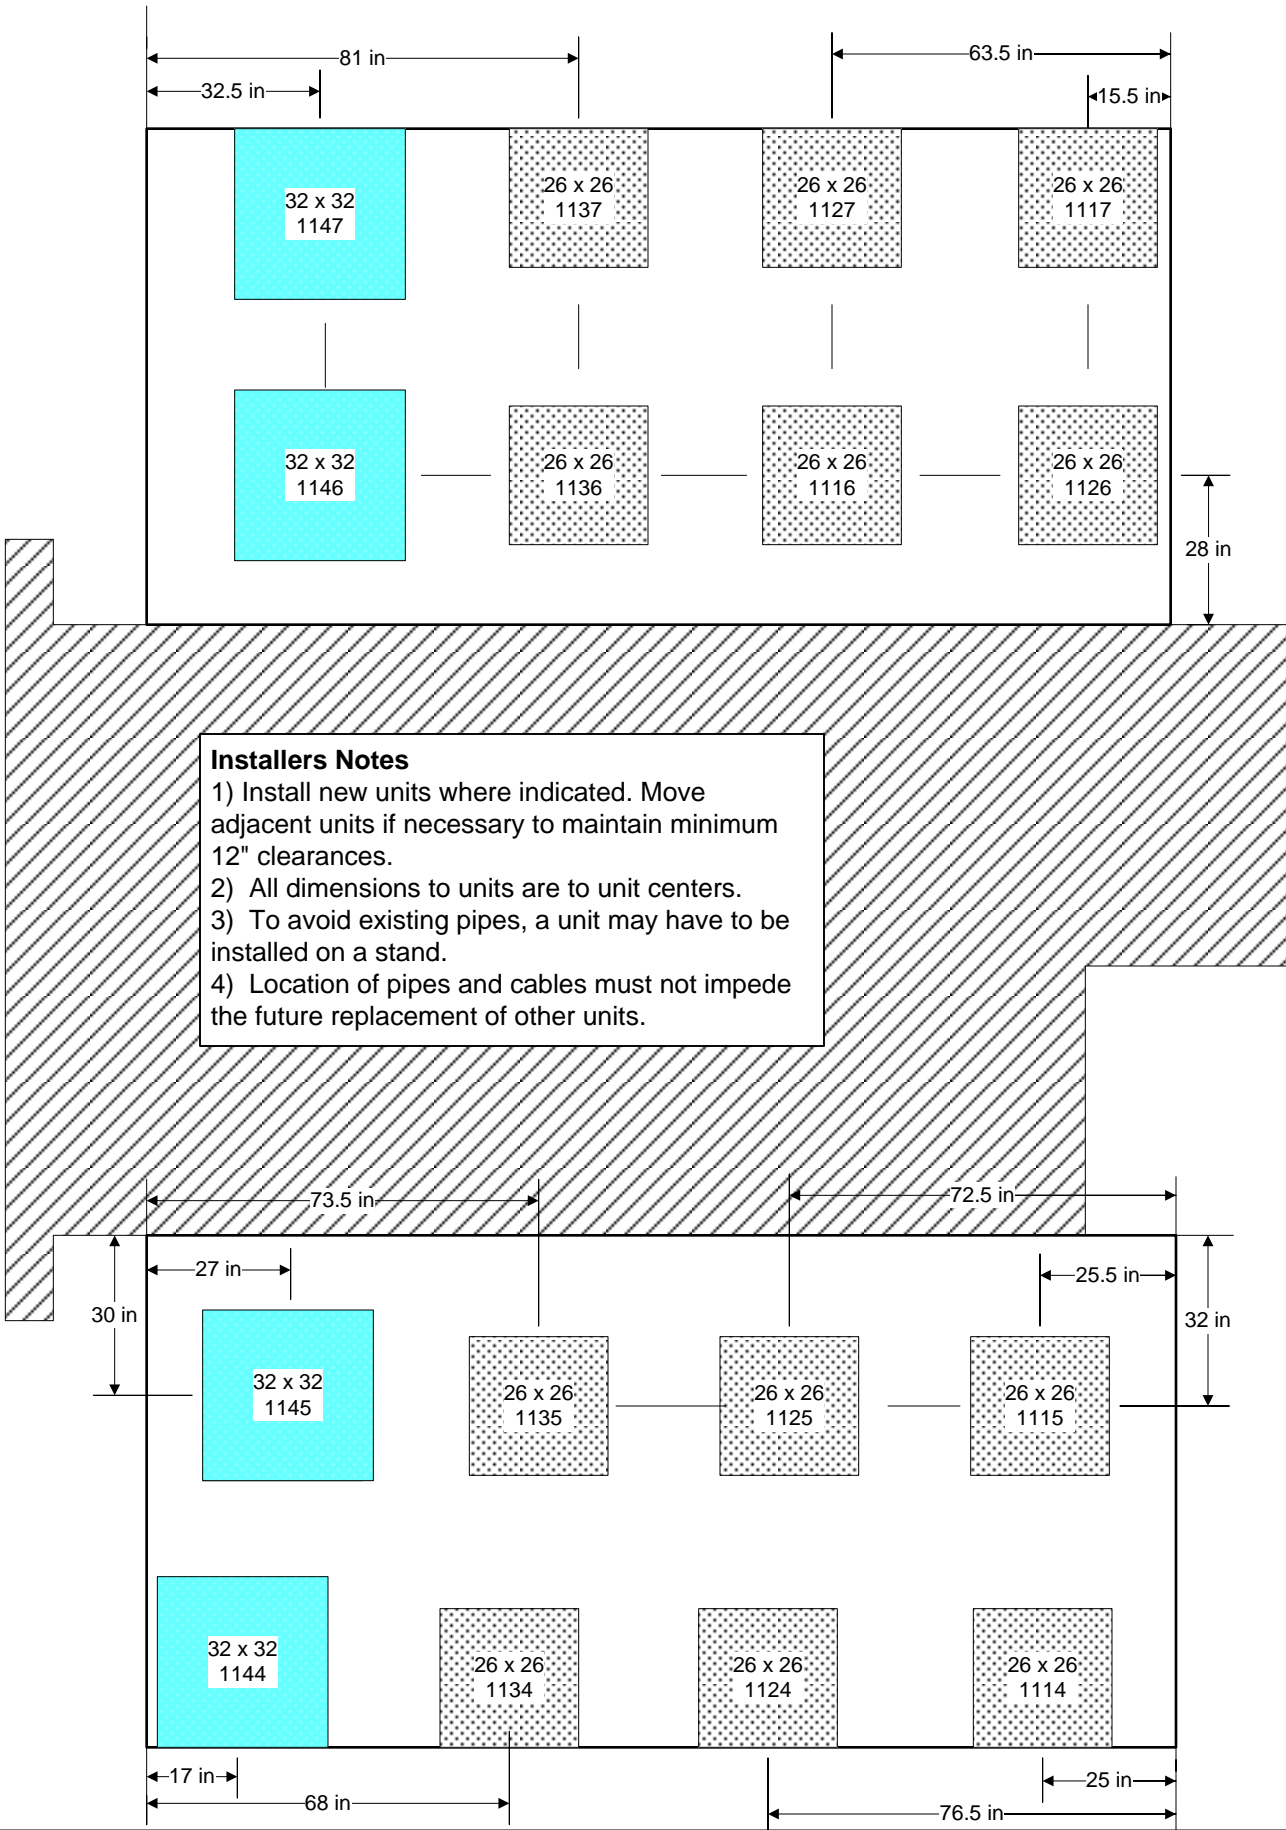



# ARC Specifications - Appendix 2

**Installers Notes**

- 1) Install new units where indicated. Move adjacent units if necessary to maintain minimum 12" clearances.
- 2) All dimensions to units are to unit centers.
- 3) To avoid existing pipes, a unit may have to be installed on a stand or relocated to a designated alternate location on a condenser unit pad.
- 4) Location of pipes and cables must not impede the future replacement of other units.
- 5) To provide for future unit clearances, this unit must extend beyond existing concrete pad and will require a condenser unit pad.

